



## FX5312 VIA Eden-v4 Small System (DIN-Rail) With VGA, 2S, 2LAN, 2USB and Audio




### Features

- Fanless and low power consumption design
- Din Rail Mount
- VIA CPU (Eden-V4 1GHz, 128KB L2 Cache Inside) and System Chipset (CX700M)
- One 200-Pin SoDIMM socket with 1GB DDR2 RAM
- Support High Definition Audio
- 10/100 Base-T Ethernet Ports (\*2)
- Support CRT
- USB V2.0 Ports (\*2)
- One CompactFlash Card Type I/II socket
- One 2.5" SATA HDD Space
- One RS232 and One CAN Bus

### Specifications

- CPU Board:** VIA Eden-V4 1GHz Low-power CPU board with 1GB DDR2 RAM
- I/O Outlets:** 1 CRT connector (UMA 128MB max.)  
2 RJ45 connectors (Realtek RTL8100C Chipset)  
2 USB connectors  
1 RS232 and 1 CAN Bus connectors  
2 Audio connectors (Mic/Line-In & Line-Out)  
1 DC jack and 1 terminal block 2-Pin connectors
- Storage Bay:** 1 2.5" SATA HDD space  
1 CompactFlash Card Type I/II socket
- Power Req.:** DC 12~24 Input, 24VA maximum
- LED Indicators:** 1 Power LED, 1 HDD LED
- Dimensions (W\*D\*H):** 50 x 102 x 145 mm
- Operating Temp.:** 0°C ~ 50°C (32°F ~ 122°F)
- Compliances:** CE · FCC · RoHS

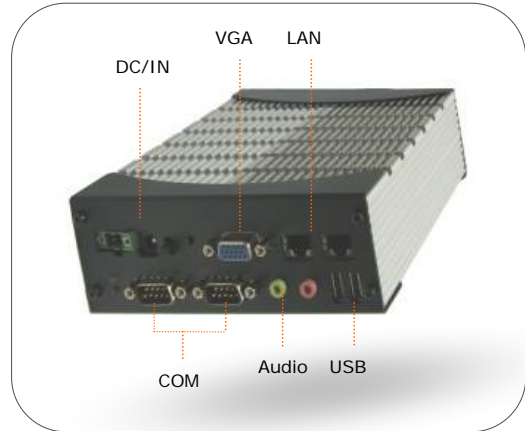

### Order Information

Model	Description	Verified OS
FX5312	VIA Eden-V4 1GHz Small System w/1S, VGA, 2LAN, 2USB, 1 CAN Bus & Audio	Windows 2000/XP/WinCE.NET, XP Embedded, Linux



FabiaTech Corp.

TEL:886-2-22789586 FAX:886-2-22789575  
4F-3, No.18, Lane 609, Chung-Hsin Rd., Sec.5, San-Chung City, Taipei Hsien, Taiwan, R.O.C.

www.fabiatech.com