

► Spanpixel

Innovative Resizing LCD Solutions from Litemax

Stretched displays with ultra-wide, customized aspect ratios.




SPANPIXEL
Resizing LCD

Product List - Spanpixel

Power Consumption/ Dimension: Panel Only

Size	Model No.	Brightness	Resolution	PPI	Ratio	Contrast	Power	Temp. Range	Viewing Angle	Dimension
6.2"	0635-E	1000	1024 x 250	169	16:4	700:1	3.9w	-30 ~ 80°C	150(H) x 145(V)	165.75 x 55 x 5.3
8"	0822-E	250	1024 x 324	133	16:5	500:1	3w	0 ~ 50°C	140(H) x 110(V)	215 x 79.2 x 7.5
9.9"	1033-E	700	800 x 200	82	16:4	600:1	3.8w	-20 ~ 70°C	160(H) x 140(V)	279 x 87.1 x 9
13.9"	1393-A	600	1280 x 398	96	16:5	700:1	19w	-30 ~ 85°C	170(H) x 160(V)	358.5 x 130 x 18
15"	1505-E	1000	1280 x 242	86	16:3	1000:1	9w	0 ~ 50°C	170(H) x 160(V)	396 x 94.2 x 12.2
15.9"	1515-E	1000	1280 x 512	86	16:6.4	1000:1	12w	0 ~ 50°C	170(H) x 160(V)	396 x 173.6 x 12.1
16.3"	1623-E	400	1366 x 238	84	16:2.8	1000:1	6.6w	0 ~ 50°C	170(H) x 160(V)	431.8 x 95.8 x 15.1
17.2"	1722-A	400	1366 x 510	84	16:6	1500:1	10w	0 ~ 50°C	170(H) x 160(V)	430.4 x 178.4 x 12
19"	1915-E	1000	1680 x 342	90	16:3	2000:1	25w	0 ~ 50°C	178(H) x 178(V)	493.7 x 123.1 x 16.7
19.1"	1916-A	1200	1920 x 388	102	16:3.2	3000:1	18w	0 ~ 50°C	178(H) x 178(V)	497.6 x 121.3 x 16.55
21.2"	2125-A	1000	1920 x 316	91	16:2.6	1000:1	17w	0 ~ 50°C	170(H) x 160(V)	555.9 x 116.91 x 17.1
27.3"	2735-A	1000	945 x 1080	51	8:9	3000:1	50w	0 ~ 50°C	178(H) x 178(V)	502.7 x 557.1 x 18.7
27.5"	2755-A	1000	1366 x 70	50	16:1	1300:1	11w	0 ~ 50°C	178(H) x 178(V)	719.5 x 67.1 x 14.4
28"	2825-E	1000	1366 x 254	50	16:3	3000:1	24w	0 ~ 50°C	178(H) x 178(V)	735.4 x 170.5 x 16.9
28"	2845-E	1000	1920 x 357	70	16:3	6500:1	30w	0 ~ 50°C	178(H) x 178(V)	735.4 x 170.5 x 18
29.3"	2925-E	1000	1366 x 512	50	16:6	2500:1	65w	0 ~ 50°C	176(H) x 176(V)	737.6 x 295.6 x 59.9
29.3"	2945-E	1000	1920 x 710	70	16:6	3000:1	48w	0 ~ 50°C	178(H) x 178(V)	735 x 298.9 x 18
34.8"	3485-INU	1000	3840 x 540	111	16:2.2	TBD	TBD	0 ~ 50°C	178(H) x 178(V)	899.4 x 149.3 x 18.85
35.8"	3585-INU	1000	3840 x 1080	111	16:4.5	TBD	TBD	0 ~ 50°C	178(H) x 178(V)	899.4 x 270.7 x 18.85
36.6"	3665-I	1000	1920 x 290	52	16:2.4	8500:1	26w	0 ~ 50°C	176(H) x 176(V)	960 x 174.2 x 15.8
36.8"	3685-I	1000	1920 x 360	52	16:3	8500:1	31w	0 ~ 50°C	176(H) x 176(V)	960 x 207.3 x 16
37.6"	3805-I	1000	1920 x 540	53	16:4.5	8500:1	40w	0 ~ 50°C	176(H) x 176(V)	965.2 x 94.7 x 19
42.1"	4215-ANK	1000	1920 x 2160	89	8:9	3000:1	145w	0 ~ 50°C	178(H) x 178(V)	741.3 x 838.02 x 22.4
43.5"	4355-INU	1000	3840 x 540	89	16:2.2	TBD	TBD	0 ~ 50°C	178(H) x 178(V)	1121.7 x 184.8 x 21.6
44.8"	4485-INU	1000	3840 x 1080	89	16:4.5	TBD	TBD	0 ~ 50°C	178(H) x 178(V)	1121.7 x 338.9 x 21.6
47.8"	4788-A	1600	1920 x 178	40	16:1.5	8000:1	52w	0 ~ 50°C	178(H) x 178(V)	1244.6 x 151.5 x 23.9
48.4"	4848-A	1600	1920 x 358	40	16:3	8000:1	78w	0 ~ 50°C	178(H) x 178(V)	1244.6 x 264.9 x 27.6
49.5"	4956-A	1200	1920 x 538	40	16:4.5	9700:1	93w	0 ~ 50°C	178(H) x 178(V)	1244.6 x 378.7 x 27.6

AOT/ Touch Screen/ Waterproof (made by request)

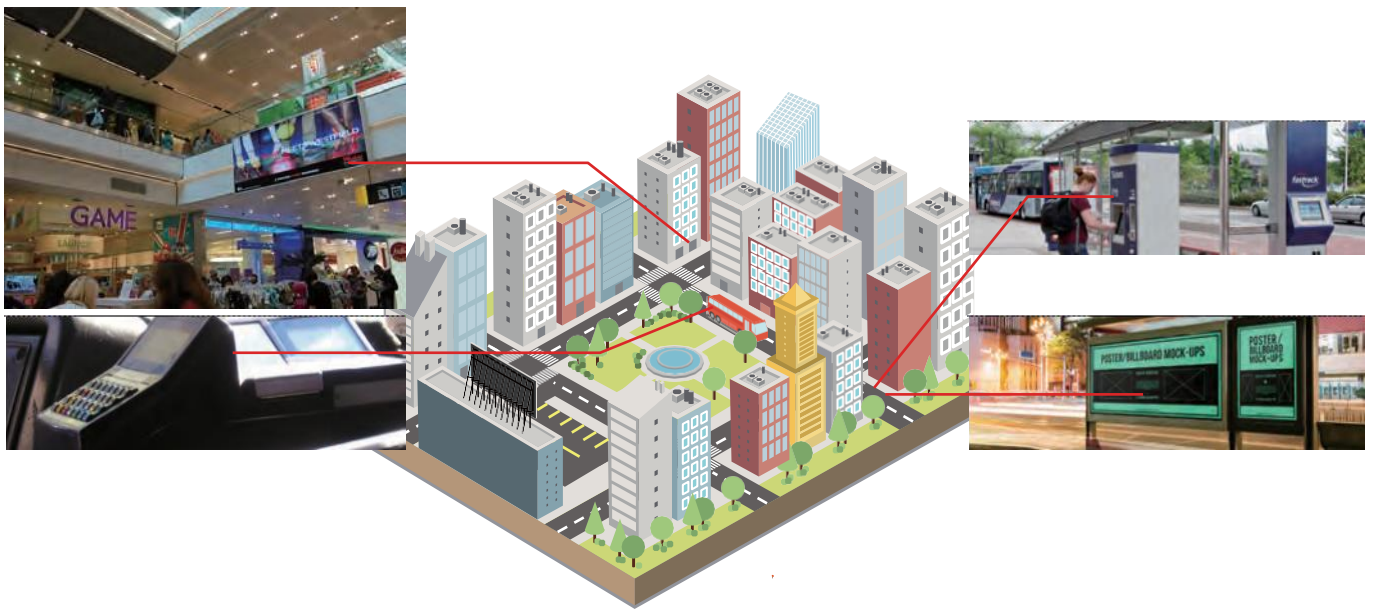

More Than 15 Years of Industrial Solution Innovation

► Litemax has enjoyed a strong reputation for expertise in sunlight readable, high brightness industrial displays, but there is so much more that we offer. Through resizing, customizations and industrial computing, we raise the standards of industrial-grade displays, digital signage applications and embedded computing to enable intelligent vertical market platforms around the world. From powering the devices in your surroundings and the machines you depend on, we create value for our customers, shareholders and ecosystem, with one ultimate goal: engineering excellence in everything we do.

► Founded in 2000, Litemax has grown from pioneering the sunlight readable, high brightness industrial display market to one of the global leaders in intelligent vertical market platforms. Our technology and innovation can be found in our high-performing, ultra-efficient solutions for transportation, industrial, marine, digital signage, rugged portables and healthcare.

► By merging WynMax, a well-known IPC designer, in 2016, we provide industrial motherboards, box PCs, panel PCs and various other industrial computing solutions. Litemax has developed a global operation infrastructure with extensive marketing and distribution channel relationships, and our products are available through leading distributors and retailers in over sixty countries worldwide.

► For more information, please visit www.litemax.com and www.wynmax.com.tw.

Industrial Computing Division	Litemax Founded in August 2000 IPO in 2012 (Stock Code: 4995) Headquarters: Taipei, Taiwan US Office: Fremont, California Europe Office: Bremen, Germany China Offices: Shanghai, Beijing	Industrial Display Division
-------------------------------	--	-----------------------------




Core Technology

▶ Why Litmax Spanpixel?

To resize a LCD is to literally cut the glass, polarizers, circuits and circuit boards to a new size. Years ago, it was thought impossible to preserve the original performance of a previously manufactured LCD once the glass circuits are cut. However, Litmax has done it, over and over again, becoming the world's leading pioneer and leader in LCD resizing solutions, offering the following advantages:

▶ Litmax offers stretched displays with ultra-wide, customized aspect ratios

- Comprehensive portfolio sizes ranging from 6" to 49"
- Exclusive patent licensee to design and manufacture in Taiwan
- Certified with EN50155 for railways and rolling stock applications

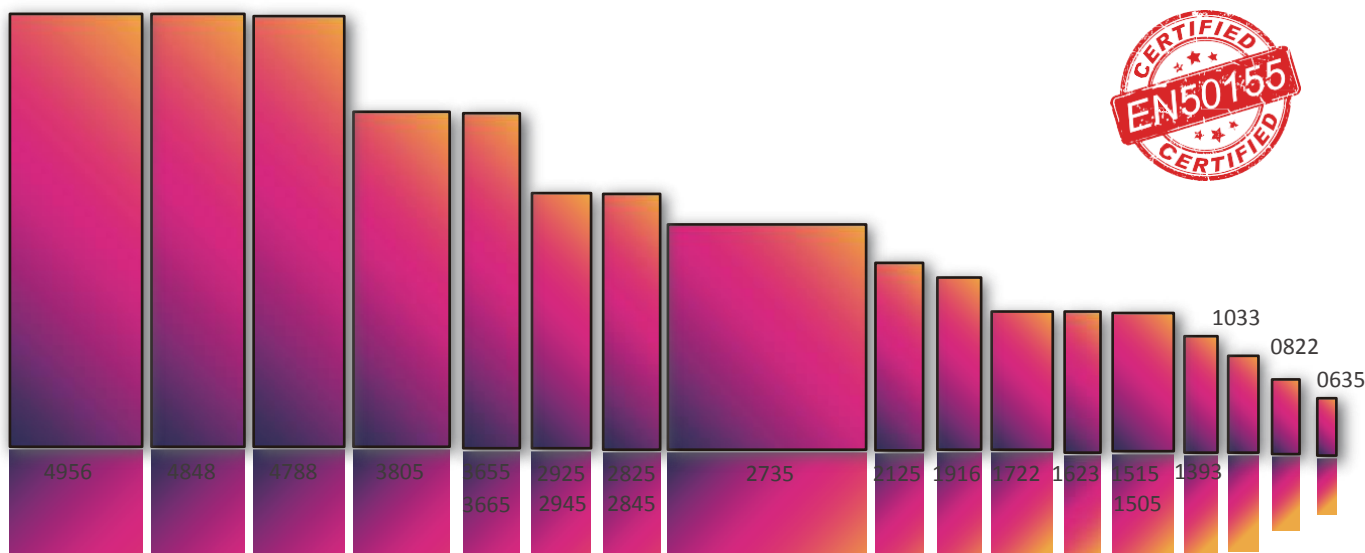

▶ Limitations with Standard LCD Displays

Space

Standard LCD displays come with standard aspect ratios, which would not fit in spaces such as on-board train cars, taxi tops and many more

Attractiveness

Standard LCD displays come with standard aspect ratios, which would not easily stand out in the crowd to attract audiences

Brightness

Standard LCD displays come with standard levels of brightness, which would not be readable under high ambient light and in turn fail to deliver messages


Industry Pioneer with Proven Records

- Among the world's firsts to design and manufacture custom-sized LCD display applications
- Long term investments in resizing technologies and manufacturing know-how for over 10 years
- Extremely high yield rate and industry-leading high quality

High Quality Panel Selection

Carefully and thoughtfully choosing the most suitable panel materials for various custom sizes

32" LCD Panel 16:9

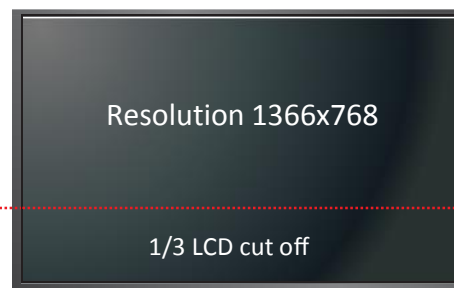

1/3 LCD cut off

16:6

SSD2925

29.3" LCD



Sophisticated Cutting Process

Litmax Spanpixel portfolio is 100% made in Taiwan. From design to testing, manufacturing to shipping, our office in Taipei is where all the magic happens. We welcome customers from all over the world to visit us and we would be delighted to take you on a tour.

Core Technology

Resizing LCD Patents CrossLicense




Litemax is an exclusive licensee in Taiwan to manufacture resizing LCD.

Each Spanpixel comes with a patent laser sticker on the back.

► Daisy Chain

Daisy chain is a wiring scheme in which multiple devices, and in this case, Litemax displays, are wired together in sequence or in a ring. There is a master chain that may come with multiple slave chains. The objective of daisy chains is to broadcast real-time information consistently and simultaneously across various different points within the installation environment. Train stations, airports,

Shock & Vibration Test




Chamber Test



department stores, large campuses, sports arenas or stadiums are among many scenarios where daisy chain technology brings great benefits to system integrators and designers. 100M long distance video/ audio transmission via an easy network CAT5 cable is the most cost effective solution for transportation.

Daisy Chain Long Distance Transmission Video/Audio

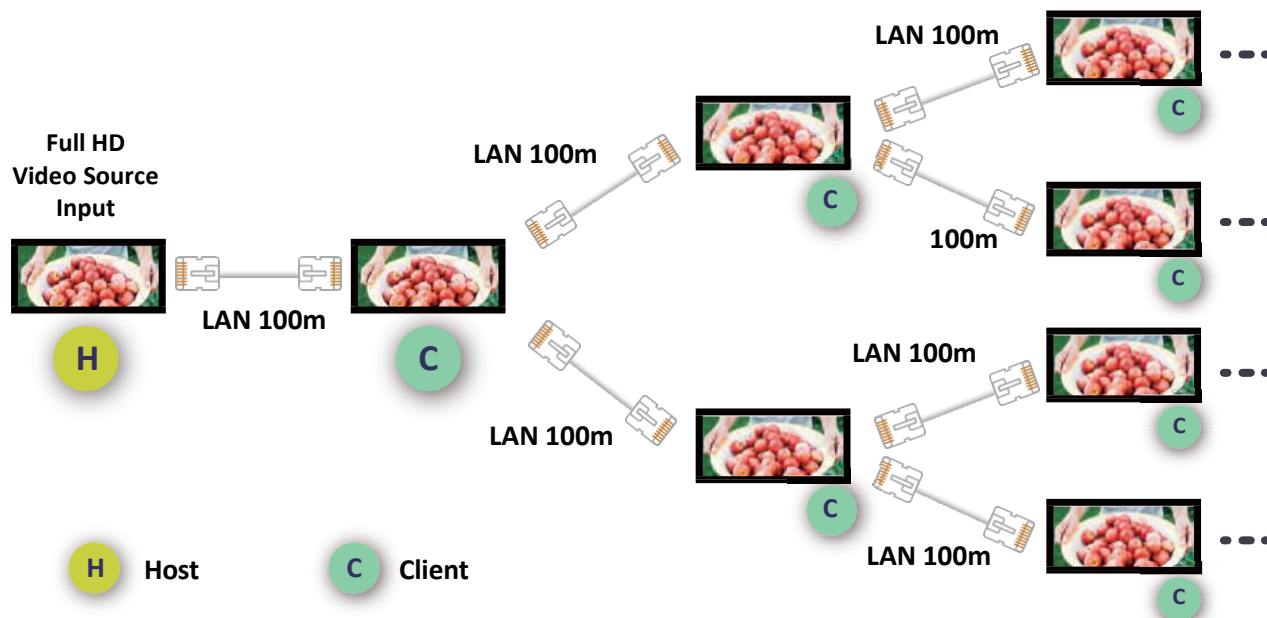

► Display over USB

Why choose a USB connected display over a standard VGA or HDMI solution using VGA, DVI, or HDMI? In many cases, a traditional display is the logical, inexpensive choice. However, there are cases where a USB display is a much better solution, without compromise:

- USB is the only port existing in future PC
- Plug and display simplicity: easily transmits signal and power at the same time
- Smooth video playback with a low latency connection

- Expandability to multiple displays while lowering overall infrastructure, installation and maintenance costs



Spanpixel SSD2755

Applications




Litemax has enjoyed a strong reputation for expertise in sunlight readable, high brightness industrial displays, but there is so much more that we offer. From powering the devices in your surroundings and the machines you depend on, we create value for our customers with one ultimate goal: engineering excellence in everything we do. Our innovation can be found in our high-performing, ultra-efficient solutions in the following applications:

- Transportation
- Industrial
- Marine
- Gaming
- Digital Signage
- Rugged Portable
- Healthcare
- Point of Sales (POS)




Display Module Illustration

- LED products (LED B/L)
- Up to 3000 nits of ultra high brightness
- Wide temperature range: -30°C ~ 80°C
- Long life time: up to 100K hours life time
- High uniformity: 80% uniformity compared with CCFL (75%)
- Low power consumption
- Low radiation, no interference: more stable compared to traditional CCFL panel
- DC power input: no need for AC inverter anymore

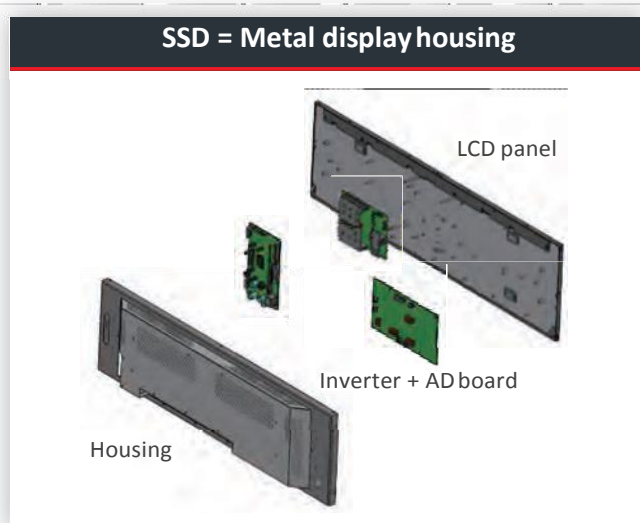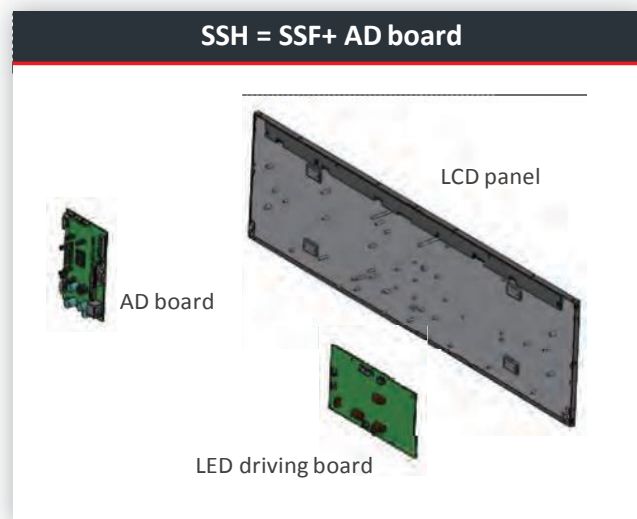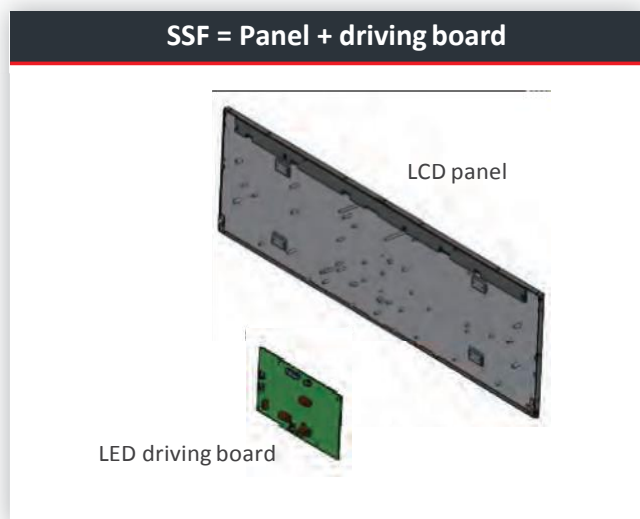

LiteMAX Display Naming Rule

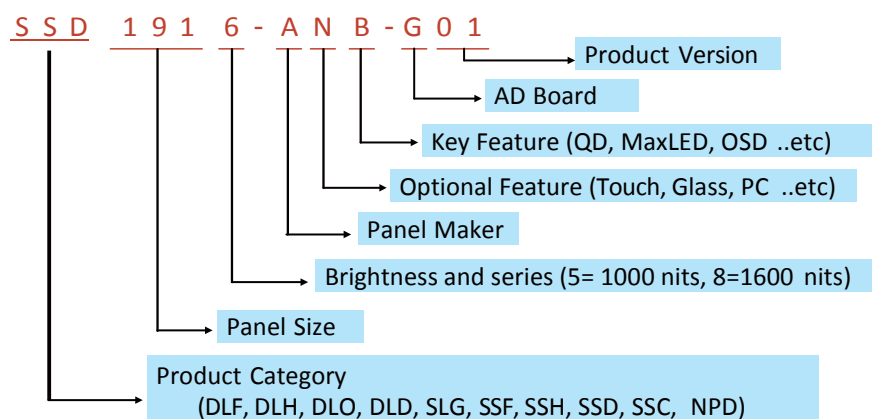

0635-E

6.2" Resizing LCD, 1000 nits LED backlight, 1024x250



Sunlight
Readable



Stretched
Display



> 1000:1
ratio
High
Contrast



MTBF
70,000 Hrs



Key Features

- e6.2" LCD
- Stretched display (aspect ratio of 16:4)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1024 x 250
- Low power consumption
- BL MTBF: 70,000 hours

Specifications

	SSF0635-E	SSH0635-E		
Description	6.2" Resizing LCD, 1000 nits LED backlight, 1024x250			
Screen size	6.2"			
Display area (mm)	153.6(H) x 37.5(V)			
Brightness	1000 cd/m²			
Resolution	1024x250			
Aspect ratio	16:4			
Contrast ratio	700:1			
Pixel pitch (mm)	0.15 (H) x 0.15 (V)			
Pixel per inch (PPI)	169			
Viewing angle	150° (H), 145° (V)			
Color saturation (NTSC)	77%			
Display colors	16.7M			
Response time (Typical)	25ms			
Video interface	LVDS	VGA, DVI-D, HDMI		
Input power		DC 12V		
Power consumption	3.91w	8.91w		
Dimensions (mm)	165.75x55x5.3	165.75x55x5.3		
Bezel size (U/B/L/R)	9.54/3.05/5.88/3.37	9.54/3.05/5.88/3.37		
Weight (Net)	0.1kg	0.4kg		
Mounting				
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	-30°C ~ +80°C			
Storage temperature	-30°C ~ +80°C			
Product approval				

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF0635-ENN-A01	6.2",1000nits,1024*250.V01(10 in 1)
SSH0635-ENN-I01	6.2",1000nits,1024*250.AD6038GM,DC 12V,V01(10 in 1)

0822-E

8" Resizing LCD, 250 nits LED backlight, 1024x324



Sunlight
Readable



Low Power
Consumption



High
Uniformity



MTBF
70,000 Hrs



Key Features

- Resizing LCD
- Stretched display (aspect ratio of 16:5)
- Brightness of 250 nits
- Resolutions: 1024 x 324
- Low power consumption
- BL MTBF: 70,000 hours

Specifications

	SSF0822-E	SSH0822-E		
Description	8" Resizing LCD, 250 nits LED backlight, 1024x324			
Screen size	8"			
Display area (mm)	195.1(H) x 61.2(V)			
Brightness	250 cd/m²			
Resolution	1024x324			
Aspect ratio	16:5			
Contrast ratio	500:1			
Pixel pitch (mm)	0.1905 (H) x 0.189 (V)			
Pixel per inch (PPI)	133			
Viewing angle	140° (H), 110° (V)			
Color saturation (NTSC)	48%			
Display colors	262K			
Response time (Typical)	25ms			
Video interface	LVDS	VGA, DVI-D		
Input power		DC 12V		
Power consumption	3w	5.8w		
Dimensions (mm)	215x79.2x7.5	215x79.2x7.5		
Bezel size (U/B/L/R)	7.4/7.25/10.99/8.91	7.4/7.25/10.99/8.91		
Weight (Net)	0.17kg	0.27kg		
Mounting				
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF0822-ENN-A01	8",250nits,1024*324.V01(10 in 1)
SSH0822-ENN-I02	8",250nits,1024*324,AD6038GD.DC 12V,V01(10 in 1)

1033-E

9.9" Resizing LCD, 700 nits LED backlight, 800x200



Stretched Display



Low Power Consumption



High Uniformity



MTBF



Key Features

- eSize LCD
- Stretched display (aspect ratio of 16:4)
- Brightness of 700 nits
- Resolutions: 800 x 200
- Low power consumption
- BL MTBF: 70,000 hours

Specifications

	SSF1033-E	SSH1033-E		SSD1033-E
Description	9.9" Resizing LCD, 700 nits LED backlight, 800x200			
Screen size	9.9"			
Display area (mm)	246.6(H) x 61.5(V)			
Brightness	700 cd/m²			
Resolution	800x200			
Aspect ratio	16:4			
Contrast ratio	600:1			
Pixel pitch (mm)	0.3075 (H) x 0.3075 (V)			
Pixel per inch (PPI)	82			
Viewing angle	160° (H), 140° (V)			
Color saturation (NTSC)	66%			
Display colors	262K			
Response time (Typical)	35ms			
Video interface	LVDS	VGA, CBVS, S-Video		
Input power		DC 12V		
Power consumption	3.8w	9.6w		
Dimensions (mm)	279x87.1x9	279x87.1x9		291x106.2x46.2
Bezel size (U/B/L/R)	13.85/6.85/16/13.95	13.85/6.85/16/13.95		21.3/21.3/22.05/22.05
Weight (Net)	0.25kg	0.38kg		1.2kg
Mounting				VESA 75x75
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	-20°C ~ +70°C			
Storage temperature	-30°C ~ +80°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1033-ENN-A01	9.9",700nits,800*200.LID on module,5 in 1,V1
SSH1033-ENN-G01	9.9",700nits,800*200.AD2662GVA,5 in 1,V1
SSD1033-ENB-G01	9.9",700nits,800*200,AD2662GVA.O/B,DC 12V input,1 in 1,V1


1393-A

13.9" Resizing LCD, 600 nits LED backlight, 1280x398



Key Features

- 13.9" LCD
- Stretched display (aspect ratio of 16 : 5)
- Brightness of 600 nits
- Resolutions of 1280 x 398
- Wide temperature range (-30°C~85°C)
- Low power consumption
- BL MTBF: 70,000 hours



Specifications

	SSF1393-A	SSH1393-A		SSD1393-A
Description	13.9" Resizing LCD, 600 nits LED backlight, 1280x398			
Screen size	13.9"			
Display area (mm)	337.92(H) x 105.14(V)			
Brightness	600 cd/m²			
Resolution	1280x398			
Aspect ratio	16:5			
Contrast ratio	700:1			
Pixel pitch (mm)	0.264 (H) x 0.264 (V)			
Pixel per inch (PPI)	96			
Viewing angle	170° (H), 160° (V)			
Color saturation (NTSC)	83%			
Display colors	16.7M			
Response time (Typical)	30ms			
Video interface	LVDS	VGA, DVI-D		
Input power		DC 12V		
Power consumption	19w	21w		
Dimensions (mm)	358.5x130x18	358.5x130x18		360.9x132.5x48.6
Bezel size (U/B/L/R)	12.05/10.14/8.45/8.45	12.05/10.14/8.45/8.45		13.3/11.4/9.7/9.7
Weight (Net)	0.7kg	0.9kg		1.5kg
Mounting				VESA 100x100
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	-30°C ~ +85°C			
Storage temperature	-30°C ~ +85°C			
Product approval				

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1393-ANN-A01	13.9",600nits,1280*398.LID on module,10 in 1,V01
SSH1393-ANN-I01	13.9",600nits,1280*398.LID on module,AD6038GD.DC12V,5 in 1,V01
SSD1393-ANB-I01	13.9",600nits,1280*398.LID on module,AD6038GD.O/B,DC12V,5 in 1,V01

1505-E

15" Resizing LCD, 1000 nits LED backlight, 1280x242



Sunlight
Readable



Stretched
Display



Low Power
Consumption



MTBF
70,000 Hrs

Key Features

- eSATA LCD
- Stretched display (aspect ratio of 16 : 3)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1280 x 242
- Low power consumption
- BL MTBF: 70,000 hours

Specifications

	SSF1505-E	SSH1505-E		SSD1505-E
Description	15" Resizing LCD, 1000 nits LED backlight, 1280x242			
Screen size	15"			
Display area (mm)	376.3(H) x 71.2(V)			
Brightness	1000 cd/m²			
Resolution	1280x242			
Aspect ratio	16:3			
Contrast ratio	1000:1			
Pixel pitch (mm)	0.294 (H) x 0.294 (V)			
Pixel per inch (PPI)	86			
Viewing angle	170° (H), 160° (V)			
Color saturation (NTSC)	79%			
Display colors	16.7M			
Response time (Typical)	5ms			
Video interface	LVDS	VGA, DVI-D		
Input power		DC 12V		
Power consumption	9w	12w		
Dimensions (mm)	396x94.2x12.2	396x94.2x12.2		408x106.2x37.8
Bezel size (U/B/L/R)	9.6/9.6/7.9/7.9	9.6/9.6/7.9/7.9		16.6/16.5/14.85/14.85
Weight (Net)	0.8kg	1kg		1.25kg
Mounting				VESA 75x75
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1505-ENN-A11	15",1000nits,1280*242,LID15A.V02
SSH1505-ENN-G11	15",1000nits,1280*242,LID15A.AD2662GDM,DC12V,V02
SSD1505-ENB-G11	15",1000ints,1280*242,LID15.AD2662GDMR,O/B,DC 12V,V02

1515-E

15.9" Resizing LCD, 1000 nits LED backlight, 1280x512



Key Features

- eSATA LCD
- Stretched display (aspect ratio of 16:6.4)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1280 x 512
- Low power consumption
- BL MTBF: 70,000 hours



Sunlight
Readable



Stretched
Display



Low Power
Consumption



MTBF
70,000 Hrs

Specifications

	SSF1515-E	SSH1515-E			SSD1515-E
Description	15.9" Resizing LCD, 1000 nits LED backlight, 1280x512				
Screen size	15.9"				
Display area (mm)	376.3(H) x 150.5(V)				
Brightness	1000 cd/m²				
Resolution	1280x512				
Aspect ratio	16:6.4				
Contrast ratio	1000:1				
Pixel pitch (mm)	0.294 (H) x 0.294 (V)				
Pixel per inch (PPI)	86				
Viewing angle	170° (H), 160° (V)				
Color saturation (NTSC)	79%				
Display colors	16.7M				
Response time (Typical)	5ms				
Video interface	LVDS		VGA, DVI-D		
Input power			DC 12V		
Power consumption	12w		15w		
Dimensions (mm)	396x173.6x12.1		396x173.6x12.1		398.4x176.2x52.7
Bezel size (U/B/L/R)	9.6/9.6/7.9/7.9		9.6/9.6/7.9/7.9		10.85/10.85/9.05/9.05
Weight (Net)	1kg		1.2kg		2.5kg
Mounting					VESA 75x75, 100x100
OSD key			4 keys (Power switch, menu, +, -)		
OSD control			Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C				
Storage temperature	-20°C ~ +60°C				
Product approval					

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSH1515-ENN-G11	15.9",1000nits,1280*512,LID15.AD2662GD,DC 12V,V02(5 in 1)
SSD1515-ENB-G11	15.9",1000nits,1280*512,LID15.O/B,AD2662GD,DC 12V,V02


1623-E

16.3" Resizing LCD, 400 nits LED backlight, 1366x238



Key Features

- Resizing LCD
- Stretched display (aspect ratio of 16:2.8)
- Brightness of 400 nits
- Resolutions: 1366 x 238
- Low power consumption
- BL MTBF: 70,000 hours



Specifications

	SSF1623-E	SSH1623-E	SSD1623-E
Description	16.3" Resizing LCD, 400 nits LED backlight, 1366x238		
Screen size	16.3"		
Display area (mm)	409.8(H) x 71.4(V)		
Brightness	400 cd/m ²		
Resolution	1366x238		
Aspect ratio	16:2.8		
Contrast ratio	1000:1		
Pixel pitch (mm)	0.3 (H) x 0.3 (V)		
Pixel per inch (PPI)	84		
Viewing angle	170° (H), 160° (V)		
Color saturation (NTSC)	70%		
Display colors	16.7M		
Response time (Typical)	5ms		
Video interface	LVDS	VGA	
Input power		DC 12V	
Power consumption	6.6w	10w	
Dimensions (mm)	431.8x95.8x15.1	431.8x95.8x15.1	436.3x100.2x47.1
Bezel size (U/B/L/R)	10.3/10.3/9.2/9.2	10.3/10.3/9.2/9.2	13.4/13.4/12.35/12.35
Weight (Net)	0.5kg	0.7kg	1.8kg
Mounting			VESA 50x50
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1623-ENN-A02	16.3",400nits,1366*238,LID16B01,10 in 1,V01
SSH1623-ENN-G01	16.3",400nits,1366*238,LID16B.AD2662GM,DC 12V,V01
SSD1623-ENB-G01	16.3",400nits,1366*238,LID16B.AD2662GDM,DC12V input,V01


1722-A

17.2" Resizing LCD, 400 nits LED backlight, 1366x512



Key Features

- Resizing LCD
- Stretched display (aspect ratio of 16:6)
- Brightness of 400 nits
- Resolutions: 1366 x 512
- Low power consumption
- BL MTBF: 70,000 hours



Specifications

	SSF1722-A	SSH1722-A		
Description	17.2" Resizing LCD, 400 nits LED backlight, 1366x512			
Screen size	17.2"			
Display area (mm)	409.8(H) x 153(V)			
Brightness	400 cd/m²			
Resolution	1366x512			
Aspect ratio	16:6			
Contrast ratio	1500:1			
Pixel pitch (mm)	0.3 (H) x 0.3 (V)			
Pixel per inch (PPI)	84			
Viewing angle	170° (H), 160° (V)			
Color saturation (NTSC)	80%			
Display colors	16.7M			
Response time (Typical)	5ms			
Video interface	LVDS	VGA, DVI-D, HDMI		
Input power		DC 12V		
Power consumption	10w	15w		
Dimensions (mm)	430.4x178.4x12	430.4x178.4x12		
Bezel size (U/B/L/R)	10.3/10.3/8.5/8.5	10.3/10.3/8.5/8.5		
Weight (Net)	1kg	1.2kg		
Mounting				
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1722-ANN-A01	17.2",400nits,1366*512,LID17A.V01(4 in 1)
SSH1722-ANN-G01	17.2",400nits,1366*512,LID17A.AD2662GDHM,4 in 1,V1

1915-E

19" Resizing LCD, 1000 nits LED backlight, 1680x342



Key Features

- e-ink LCD
- Stretched display (aspect ratio of 16:3)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1680 x 342
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 70,000 hours



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF
70,000 Hrs

Specifications

	SSH1915-E	SSD1915-E
Description	19" Resizing LCD, 1000 nits LED backlight, 1680x342	
Screen size	19"	
Display area (mm)	473.76(H) x 96.44(V)	
Brightness	1000 cd/m ²	
Resolution	1680x342	
Aspect ratio	16:3	
Contrast ratio	2000:1	
Pixel pitch (mm)	0.282 (H) x 0.282 (V)	
Pixel per inch (PPI)	90	
Viewing angle	178° (H), 178° (V)	
Color saturation (NTSC)	76%	
Display colors	16.7M	
Response time (Typical)	20ms	
Video interface	VGA, DVI-D	
Input power	DC 12V	
Power consumption	25w	
Dimensions (mm)	493.7x123.1x16.7	496.6x126x57.3
Bezel size (U/B/L/R)	10.2/10.2/8/8	11.65/11.65/9.45/9.45
Weight (Net)	1kg	2.3kg
Mounting		VESA 75x75, 100x100
OSD key	4 keys (Power switch, menu, +, -)	
OSD control	Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C	
Storage temperature	-20°C ~ +60°C	
Product approval		CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSH1915-ENN-G01	19",1000nits,1680*342,LID19.AD2662GD,LS,DC 12V input,V2
SSD1915-ENB-G01	19",1000nits,1680*342,LID19.AD2662GDMR.O/B,DC12V input,V01

1916-A

19.1" Resizing LCD, 1200 nits LED backlight, 1920x388



Key Features

- Resizing LCD
- Stretched display (aspect ratio of 16:3.2)
- Sunlight readable, high brightness (1,200 nits)
- Resolutions: 1920 x 388
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 70,000 hours



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF

70,000 Hrs

Specifications

	SSF1916-A	SSH1916-A		SSD1916-A
Description	19.1" Resizing LCD, 1200 nits LED backlight, 1920x388			
Screen size	19.1"			
Display area (mm)	476.6(H) x 96.3(V)			
Brightness	1200 cd/m²			
Resolution	1920x388			
Aspect ratio	16:3:2			
Contrast ratio	3000:1			
Pixel pitch (mm)	0.248 (H) x 0.248 (V)			
Pixel per inch (PPI)	102			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	84%			
Display colors	16.7M			
Response time (Typical)	25ms			
Video interface	LVDS	VGA, DVI-D, HDMI		
Input power		DC 12V		
Power consumption	18w	23w		
Dimensions (mm)	497.6x121.3x16.55	497.6x121.3x16.55		508x132x47
Bezel size (U/B/L/R)	10.35/10.35/8.9/8.9	10.35/10.35/8.9/8.9		17/17/15/15
Weight (Net)	0.8kg	1kg		2.4kg
Mounting				VESA 100x100
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1916-ANN-A01	19.1",1200nits,1920*388,LID19A.V01(5 in 1)
SSH1916-ANN-G02	19.1",1200nits,1920*388,LID19A.AD2662GDM,DC12V,V01(5 in 1)
SSD1916-ANB-G01	19.1",1200nits,1920*388,LID19A.AD2662GDHMA,HDMI+USB board.Spesker*2,DC 12V,V01

2125-A

21.2" Resizing LCD, 1000 nits LED backlight, 1920x316



Sunlight
Readable



Stretched
Display



Low Power
Consumption



MTBF
100,000 Hrs

Key Features

- 21.2" Resizing LCD
- Stretched display (aspect ratio of 16:2.6)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 316
- Low power consumption
- BL MTBF: 100,000 hours



Specifications

	SSF2125-A	SSH2125-A		SSD2125-A
Description	21.2" Resizing LCD, 1000 nits LED backlight, 1920x316			
Screen size	21.2"			
Display area (mm)	531.36(H) x 87.4(V)			
Brightness	1000 cd/m²			
Resolution	1920x316			
Aspect ratio	16:2.6			
Contrast ratio	1000:1			
Pixel pitch (mm)	0.276 (H) x 0.276 (V)			
Pixel per inch (PPI)	91			
Viewing angle	170° (H), 160° (V)			
Color saturation (NTSC)	77%			
Display colors	16.7M			
Response time (Typical)	5ms			
Video interface	LVDS	VGA, DVI-D, DP		
Input power		DC 12V		
Power consumption	17w	20w		
Dimensions (mm)	555.9x116.91x17.1	555.9x116.91x17.1		558.5x119.5x46.1
Bezel size (U/B/L/R)	10.1/15.2/10.3/10.3	10.1/15.2/10.3/10.3		11.4/16.5/11.6/11.6
Weight (Net)	1kg	1.1kg		2.1kg
Mounting				VESA 150x30
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2125-ANN-A01	21.2",1000nits,1920*316.LID21A,5 in 1,V1
SSH2125-ANN-I01	21.2",1000nits,1920*316.AD6038GDP+LID,DC 12V,5 in 1.V1
SSD2125-ANB-I01	21.2",1000nits,1920*316.AD6038GDP+LID,O/B,DC 12V.3 in 1,V1


2735-A

27.3" Resizing LCD, 1000 nits LED backlight, 945x1080



Key Features

- e-ink LCD
- Square display (aspect ratio of 8 : 9)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 945 x 1080
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 70,000 hours

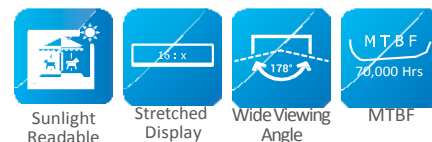

Specifications

	SSF2735-A	SSH2735-A		
Description	27.3" Resizing LCD, 1000 nits LED backlight, 945x1080			
Screen size	27.3"			
Display area (mm)	457.85(H) x 523.26(V)			
Brightness	1000 cd/m ²			
Resolution	945x1080			
Aspect ratio	8:9			
Contrast ratio	3000:1			
Pixel pitch (mm)	0.4845 (H) x 0.4845 (V)			
Pixel per inch (PPI)	51			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	77%			
Display colors	16.7M			
Response time (Typical)	6.5ms			
Video interface	LVDS	VGA		
Input power		DC 12V		
Power consumption	50w	50w		
Dimensions (mm)	502.7x557.1x18.7	502.7x557.1x18.7		
Bezel size (U/B/L/R)	12.5/12.5/18/18	12.5/12.5/18/18		
Weight (Net)	4.1kg	4.1kg		
Mounting				
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2735-ANN-A01	27.3,1000nits,945*1080,LID27A.V01(5 in 1)
SSH2735-ANN-G01	27.3,1000nits,945*1080,LID27A.AD2662GM,DC 12V,V01(5 in 1)

2755-A



27.5" Resizing LCD, 1000 nits LED backlight, 1366x70 smart shelf display



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF
70,000 Hrs

Key Features

- e-ink LCD
- Stretched display (aspect ratio of 16:1)
- Brightness of 1000 nits
- Resolutions: 1366 x 70
- Wide viewing angle of 178° (H), 178° (V)
- USB 3.0 functionality
- Low power consumption

Specifications

	SSF2755-A	SSH2755-A	SSD2755-A	SSD2755-A
Description	27.5” Resizing LCD, 1000 nits LED backlight, 1366x70 smart shelf display			
Screen size	27.5"			
Display area (mm)	697.7(H) x 35.7(V)			
Brightness	1000 cd/m²	1000 cd/m²	1000 cd/m²	400 cd/m²
Resolution	1366x70			
Aspect ratio	16:1			
Contrast ratio	1300:1			
Pixel pitch (mm)	0.51075 (H) x 0.51075 (V)			
Pixel per inch (PPI)	50			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	80%			
Display colors	16.7M			
Response time (Typical)	6.5ms			
Video interface	LVDS	DVI-D	DVI-D	USB 3.0
Input power		DC 12V	DC 12V	USB 3.0
Power consumption	11w	16w	16w	4.5w
Dimensions (mm)	502.7x557.1x18.7	502.7x557.1x18.7	719.5x67.1x32.8	719.5x67.1x32.8
Bezel size (U/B/L/R)	15/15/10.3/10.3	15/15/10.3/10.3	13.7/13.7/8.9/8.9	TBD
Weight (Net)	1kg	1kg	1.5kg	1.5kg
Mounting			VESA 340x40, 260 x40	VESA 340x40, 260 x40
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval			CE, FCC	CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2755-ANN-A01	27.5",1000nits,1366*70,LID27A.5 in 1,V1
SSH2755-ANN-I01	27.5",1000nits,1366*70,LID27A.,AD6038DM,DC 12V,5 in 1,V1
SSD2755-ANB-I01	27.5",1000nits,1366*70,LID27A.,AD6038DM,O/B,DC 12V,5 in 1,V1
SSD2755-ANN-U01	27.5",400nits,1366*70,USB3.0,5 in 1,V1

2825-E

28" Resizing LCD, 1000 nits LED backlight, 1366x254



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF
100,000 Hrs

Key Features

- e28" LCD
- Stretched display (aspect ratio of 16:3)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1366 x 254
- Wide viewing angle of 178° (H), 178° (V)
- EN50155 certified
- BL MTBF: 100,000 hours



Specifications

	SSF2825-E	SSH2825-E		SSD2825-E
Description	28" Resizing LCD, 1000 nits LED backlight, 1366x254			
Screen size	28"			
Display area (mm)	697.7(H) x 129.7(V)			
Brightness	1000 cd/m²			
Resolution	1366x254			
Aspect ratio	16:3			
Contrast ratio	3000:1			
Pixel pitch (mm)	0.51 (H) x 0.51 (V)			
Pixel per inch (PPI)	50			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	80%			
Display colors	16.7M			
Response time (Typical)	6.5ms			
Video interface	LVDS	VGA, DVI-D, HDMI		
Input power		DC 12V		
Power consumption	24w	28w		
Dimensions (mm)	735.4x170.5x16.9	735.4x170.5x16.9		745.6x183.3x57.5
Bezel size (U/B/L/R)	15/18/15/15	15/18/15/15		20/20/17/17
Weight (Net)	2.4kg	2.5kg		5.2kg
Mounting				VESA 100x100
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2825-ENN-A23	28",1000nits,1366*254,LID28A.CL,DC 12V,V03(4 in 1)
SSH2825-ENN-G23	28",1000nits,1366*254,LID28A.AD2662GD,HCLR Film,DC 12V.V03(4 in 1)
SSD2825-ENB-G23	28",1000nits,1366*254,LID28A.AD2662GDHDM,USB+HDMI board.RS232,O/B,DC 12V,V3

2845-E

28" Resizing LCD, 1000 nits LED backlight, 1920x357



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF

Key Features

- e28" LCD
- Stretched display (aspect ratio of 16:3)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 357
- Wide viewing angle of 178° (H), 178° (V)
- EN50155 certified
- BL MTBF: 70,000 hours



Specifications

	SSF2845-E	SSH2845-E		SSD2845-E
Description	28" Resizing LCD, 1000 nits LED backlight, 1920x357			
Screen size	28"			
Display area (mm)	698.4(H) x 129.8(V)			
Brightness	1000 cd/m²			
Resolution	1920x357			
Aspect ratio	16:3			
Contrast ratio	6500:1			
Pixel pitch (mm)	0.3637 (H) x 0.3637 (V)			
Pixel per inch (PPI)	70			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	80%			
Display colors	16.7M			
Response time (Typical)	6.5ms			
Video interface	LVDS	VGA, DVI-D, DP		
Input power		DC 12V		
Power consumption	30w	35w		
Dimensions (mm)	735.4x170.5x18	735.4x170.5x18		745.6x183.3x57.5
Bezel size (U/B/L/R)	15/18/15/15	15/18/15/15		24.9/24.9/22.1/22.1
Weight (Net)	2.1kg	2.3kg		5.6kg
Mounting				VESA 75x75
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2845-ENN-A21	28",1000nits,1920*357,LID28A.V03(4 in 1)
SSH2845-ENN-I21	28",1000nits,1920*357,LID36A.AD6038GDPA,DC 12V,V03(4 in 1)
SSD2845-ENB-G23	28",1000nits,1920*357,LID28A.AD2662GDH+USB(DC5V),O/B.DC70~110V,V03(2 in 1)

2925-E

29.3" Resizing LCD, 1000 nits LED backlight, 1366x512



Key Features


- 29.3" LCD
- Stretched display (aspect ratio of 16:6)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1366 x 512
- Wide viewing angle of 176° (H), 176° (V)
- Low power consumption
- BL MTBF: 70,000 hours



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF
70,000 Hrs

Specifications

	SSF2925-E	SSH2925-E		SSD2925-E
Description	29.3" Resizing LCD, 1000 nits LED backlight, 1366x512			
Screen size	29.3"			
Display area (mm)	697.68(H) x 261.5(V)			
Brightness	1000 cd/m²			
Resolution	1366x512			
Aspect ratio	16:6			
Contrast ratio	2500:1			
Pixel pitch (mm)	0.51075 (H) x 0.51075 (V)			
Pixel per inch (PPI)	50			
Viewing angle	176° (H), 176° (V)			
Color saturation (NTSC)	74%			
Display colors	16.7M			
Response time (Typical)	6.5ms			
Video interface	LVDS	VGA, DVI-D		
Input power		DC 12V		
Power consumption	65w	70w		
Dimensions (mm)	737.6x295.6x59.9	737.6x295.6x59.9		740.2x298x60.9
Bezel size (U/B/L/R)	15/18/15/15	15/18/15/15		10.3/10.3/11/11
Weight (Net)	4kg	4.1kg		7KG
Mounting				VESA 500x100
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2925-ENN-A01	29.3",1000nits,1366*512.LID29A02,2-in-1 carton,V1
SSH2925-ENN-G01	29.3",1000nits,1366*512.LID29A02,AD2662GD,O/B.DC 12V,2-in-1 carton,V1
SSD2925-ENB-G07	29.3",1000nits,1366*512,LID29.AD2662GD+RS232,O/B,DC 12V input.PF,2-in-1 carton,V01

2945-E

29.3" Resizing LCD, 1000 nits LED backlight, 1920x710



Key Features

- e29.3" LCD
- Stretched display (aspect ratio of 16:6)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 710
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 70,000 hours



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF
70,000 Hrs

Specifications

	SSF2945-E	SSH2945-E		SSD2945-E
Description	29.3" Resizing LCD, 1000 nits LED backlight, 1920x710			
Screen size	29.3"			
Display area (mm)	698.4(H) x 258.2(V)			
Brightness	1000 cd/m²			
Resolution	1920x710			
Aspect ratio	16:6			
Contrast ratio	3000:1			
Pixel pitch (mm)	0.3637 (H) x 0.3637 (V)			
Pixel per inch (PPI)	70			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	80%			
Display colors	16.7M			
Response time (Typical)	8ms			
Video interface	LVDS	VGA, DVI-D, HDMI		
Input power		DC 12V		
Power consumption	48w	53w		
Dimensions (mm)	735x298.9x18	735x298.9x18		740.6x306.7x63.7
Bezel size (U/B/L/R)	15/18/15/15	15/18/15/15		22.3/22.3/19.3/19.3
Weight (Net)	3.2kg	3.3kg		8.6kg
Mounting				VESA 500x100
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2945-ENN-A11	29.3",1000nits,1920*710.LID29A,V02(2 in 1)
SSH2945-ENN-G12	29.3",1000nits,1920*710.LID29A,AD2662GDHM,DC 12V.V02(2 in 1)
SSD2945-ENB-G12	29.3",1000nits,1920*710,LID29A.AD2662GDHM,USB+HDMI board.O/B,DC9~36V(Isolated),V02

3485-INU

34.8" Resizing LCD, 1000 nits LED backlight, 3840x540



TAXI



Key Features

- eSATA LCD
- Stretched display (aspect ratio of 16:2.2)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 3840 x 540
- Wide viewing angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours



Sunlight
Readable



Stretched
Display



4K2K



MTBF
100,000 Hrs

Specifications

	SSF3485-INU		SSH3485-INU			SSD3485-INU	
Description	34.8" Resizing LCD, 1000 nits LED backlight, 3840x540						
Screen size	34.8"						
Display area (mm)	878.112(H) x 121.33(V)						
Brightness	1000 cd/m²						
Resolution	3840x540						
Aspect ratio	16:2.2						
Contrast ratio	TBD						
Pixel pitch (mm)	0.2247 (H) x 0.2247 (V)						
Pixel per inch (PPI)	111						
Viewing angle	178° (H), 178° (V)						
Color saturation (NTSC)	TBD						
Display colors	1.07G						
Response time (Typical)	8.5ms						
Video interface	V-by-One		DVI-D, HDMI, DP				
Input power			AC 100~240V				
Power consumption	TBD		TBD				
Dimensions (mm)	899.4x149.3x18.85		899.4x149.3x18.85			902x152x62.2	
Bezel size (U/B/L/R)	12.02/12.02/8.64/8.64		12.02/12.02/8.64/8.64			13.3/13.3/9.9/9.9	
Weight (Net)	2.6kg		2.6kg			6kg	
Mounting						VESA 400x200	
OSD key			4 keys (Power switch, menu, +, -)				
OSD control			Brightness, color, contrast, H/V position... etc				
Operating temperature	0°C ~ +50°C						
Storage temperature	-20°C ~ +60°C						
Product approval						CE, FCC	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information


DLF3485-INU-A01	34.8",1000nits,3840x540,LID34,3in1,V1
DLH3485-INU-M01	34.8",1000nits,3840x540,LID34,AD9131DHPA,AC100~240V,3in1,V1
DLD3485-INU-M01	34.8",1000nits,3840x540,LID34,AD9131DHPA,O/B,Speaker*2,AC100~240V,V1

3585-I

35.8" Resizing LCD, 1000 nits LED backlight, 3840x1080



TAXI

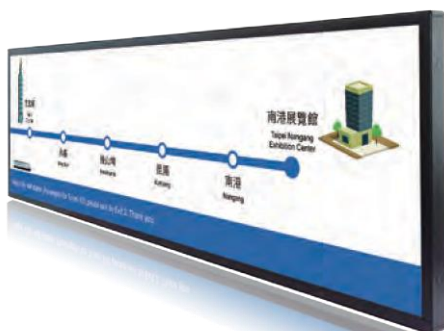

Key Features

- eSATA LCD
- Stretched display (aspect ratio of 16:4.5)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 3840 x 1080
- Wide viewing angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours



Sunlight
Readable



Stretched
Display



4K2K



Wide Viewing
Angle

Specifications

	SSF3585-INU		SSH3585-INU			SSD3585-INU	
Description	35.8" Resizing LCD, 1000 nits LED backlight, 3840x1080						
Screen size	35.8"						
Display area (mm)	878.112(H) x 242.67(V)						
Brightness	1000 cd/m²						
Resolution	3840x1080						
Aspect ratio	16:4.5						
Contrast ratio	TBD						
Pixel pitch (mm)	0.2247 (H) x 0.2247 (V)						
Pixel per inch (PPI)	111						
Viewing angle	178° (H), 178° (V)						
Color saturation (NTSC)	TBD						
Display colors	1.07G						
Response time (Typical)	8.5ms						
Video interface	V-by-One		DVI-D, HDMI, DP				
Input power			AC 100~240V				
Power consumption	TBD		TBD				
Dimensions (mm)	899.4x270.7x18.85		899.4x270.7x18.85			902x273.3x62.2	
Bezel size (U/B/L/R)	12.02/12.02/8.64/8.64		12.02/12.02/8.64/8.64			13.3/13.3/9.9/9.9	
Weight (Net)	4.3kg		4.3kg			9.2kg	
Mounting						VESA 400x200	
OSD key			4 keys (Power switch, menu, +, -)				
OSD control			Brightness, color, contrast, H/V position... etc				
Operating temperature	0°C ~ +50°C						
Storage temperature	-20°C ~ +60°C						
Product approval						CE, FCC	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3585-INU-A01	35.8",1000nits,3840x1080,LID35,3in1,V1
SSH3585-INU-M01	35.8",1000nits,3840x1080,LID35,AD9131DHPA,AC100~240V,3in1,V1
SSD3585-INU-M01	35.8",1000nits,3840x1080,LID35,AD9131DHPA,O/B,Speaker*2,AC100~240V,V1

3665-I

36.6" Resizing LCD, 1000 nits LED backlight, 1920x290



TAXI



Key Features


- 36.6" LCD
- Stretched display (aspect ratio of 16 : 2.4)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 290
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF
100,000 Hrs

Specifications

	SSF3665-I	SSH3665-I		SSD3665-I
Description	36.6" Resizing LCD, 1000 nits LED backlight, 1920x290			
Screen size	36.6"			
Display area (mm)	919.3(H) x 138.3(V)			
Brightness	1000 cd/m²			
Resolution	1920x290			
Aspect ratio	16:2.4			
Contrast ratio	8500:1			
Pixel pitch (mm)	0.4788 (H) x 0.4788 (V)			
Pixel per inch (PPI)	52			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	80%			
Display colors	16.7M			
Response time (Typical)	9.5ms			
Video interface	LVDS	VGA, DVI-D, HDMI		
Input power		DC 12V		
Power consumption	26w	31w		
Dimensions (mm)	960x174.2x15.8	960x174.2x15.8		TBD
Bezel size (U/B/L/R)	15.2/15.2/17.9/17.9	15.2/15.2/17.9/17.9		TBD
Weight (Net)	3.2kg	3.3kg		TBD
Mounting				TBD
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3685-INN-A01	36.8",1000nits,1920*360,LID36A.2in1,V1
SSH3685-INN-G01	36.8",1000nits,1920*360,LID36A.AD2662GDHM,DC 12V,2 in 1.V1
SSD3685-INB-G01	36.8",1000nits,1920*360,LID36A.AD2662GDHM,O/B,DC 12V,2 in 1.V1

3685-I

36.8" Resizing LCD, 1000 nits LED backlight, 1920x360



TAXI



Key Features

- Resizing LCD
- Stretched display (aspect ratio of 16 : 3)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 360
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF
100,000 Hrs

Specifications

	SSF3685-I	SSH3685-I		SSD3685-I
Description	36.8" Resizing LCD, 1000 nits LED backlight, 1920x360			
Screen size	36.8"			
Display area (mm)	919.3(H) x 172.3(V)			
Brightness	1000 cd/m²			
Resolution	1920x360			
Aspect ratio	16:3			
Contrast ratio	8500:1			
Pixel pitch (mm)	0.4788 (H) x 0.4788 (V)			
Pixel per inch (PPI)	52			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	80%			
Display colors	16.7M			
Response time (Typical)	9.5ms			
Video interface	VGA, DVI-D	VGA, DVI-D, HDMI		
Input power		DC 12V		
Power consumption	31W	36W		
Dimensions (mm)	960x207.3x16	960x207.3x16		TBD
Bezel size (U/B/L/R)	15.2/15.2/17.8/17.8	15.2/15.2/17.8/17.8		TBD
Weight (Net)	3.5kg	3.8kg		TBD
Mounting				TBD
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3685-INN-A01	36.8",1000nits,1920*360,LID36A.2in1,V1
SSH3685-INN-G01	36.8",1000nits,1920*360,LID36A.AD2662GDHM,DC 12V,2 in 1.V1
SSD3685-INB-G01	36.8",1000nits,1920*360,LID36A.AD2662GDHM,O/B,DC 12V,2 in 1.V1

3805-I

37.6" Resizing LCD, 1000 nits LED backlight, 1920x540



TAXI



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF
70,000 Hrs

Key Features

- eSizing LCD
- Stretched display (aspect ratio of 16 : 4.5)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 540
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours



Specifications

	SSF3805-I	SSH3805-I		SSD3805-I
Description	37.6" Resizing LCD, 1000 nits LED backlight, 1920x540			
Screen size	37.6"			
Display area (mm)	919.30(H) x 258.5(V)			
Brightness	1000 cd/m²			
Resolution	1920x540			
Aspect ratio	16:4.5			
Contrast ratio	8500:1			
Pixel pitch (mm)	0.4788 (H) x 0.4788 (V)			
Pixel per inch (PPI)	53			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	80%			
Display colors	16.7M			
Response time (Typical)	6.5ms			
Video interface	LVDS	VGA, DVI-D, HDMI		
Input power		DC 12V		
Power consumption	40w	42w		
Dimensions (mm)	965x294.7x19	965x294.7x19		TBD
Bezel size (U/B/L/R)	15.2/23.75/17.85/17.85	15.2/23.75/17.85/17.85		TBD
Weight (Net)	4.8kg	5kg		TBD
Mounting				TBD
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3805-INN-A21	37.6",1000nits,1920*540,LID38A.2 in 1,V3
SSH3805-INN-G21	37.6",1000nits,1920*540,LID38A.AD2662GDHM,DC12, 2in1, V3
SSD3805-INB-G21	37.6",1000nits,1920*540,LID38A.AD2662GDHM,O/B,DC12, 2in1,V3

4215-A

42.1" Resizing LCD, 1000 nits LED backlight, MaxRGB, 1900x2160



Sunlight
Readable



Stretched
Display



MaxRGB



4K2K

Key Features

- Resizing LCD
- Stretched display (aspect ratio of 8 : 9)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1900 x 2160
- MaxRGB (NTSC 94%)
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours

Specifications

	SSF4215-ANK	SSH4215-ANK		SSD4215-ANK
Description	42.1" Resizing LCD, 1000 nits LED backlight,MaxRGB, 1900x2160			
Screen size	42.1"			
Display area (mm)	706.8(H) x 803.5 (V)			
Brightness	1000 cd/m²			
Resolution	1900x2160			
Aspect ratio	8:9			
Contrast ratio	3000:1			
Pixel pitch (mm)	0.372 (H) x 0.372 (V)			
Pixel per inch (PPI)	89			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	94%			
Display colors	1.07G			
Response time (Typical)	9.5ms			
Video interface	V-by-One	DVI-D, HDMI, DP		
Input power		AC 100~240V		
Power consumption	145W	150W		
Dimensions (mm)	741.3x838.02x22.4	741.3x838.02x22.4		TBD
Bezel size (U/B/L/R)	15/15/15/15	15/15/15/15		TBD
Weight (Net)	14kg	15kg		TBD
Mounting				TBD
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4215-ANK-A01	42.1"(right),1000nits.1900*2160,MaxRGB,LID42,2 in 1,V1
SSF4215-ANK-A02	42.1"(left),1000nits.1900*2160,MaxRGB,LID42,2 in 1,V1
SSH4215-ANK-M01	42.1"(right),1000nits.1900*2160,MaxRGB,LID42,AD9131DHP,AC100~240V,2 in 1,V1
SSH4215-ANK-M02	42.1"(left),1000nits.1900*2160,MaxRGB,LID42,AD9131DHP,AC100~240V,2 in 1,V1
SSD4215-ANK-M01	42.1"(right),1000nits.1900*2160,MaxRGB,LID42,AD9131DHPA,O/B,Speaker*2,AC100~240V,V1
SSD4215-ANK-M02	42.1"(left),1000nits.1900*2160,MaxRGB,LID42,AD9131DHP,O/B,Speaker*2,AC100~240V,V1

4355-INU

43.5" Resizing LCD, 1000 nits LED backlight, 3840x540



TAXI



Sunlight
Readable




Stretched
Display



MaxRGB



4K2K

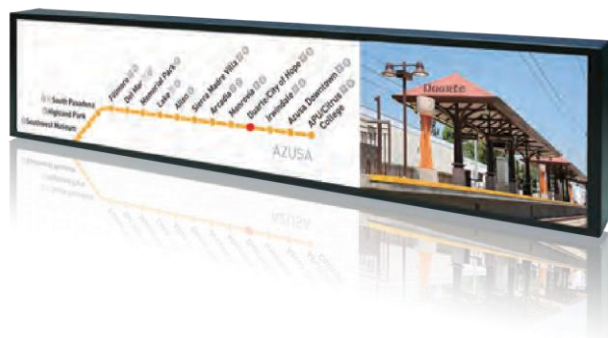

Key Features

- 43.5" LCD
- Stretched display (aspect ratio of 16 : 2.2)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 3840 x 540
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours

Specifications

	SSF4355-INU		SSH4355-INU			SSD4355-INU	
Description	43.5" Resizing LCD, 1000 nits LED backlight, 3840x540						
Screen size	43.5"						
Display area (mm)	1095.84(H) x 154.11 (V)						
Brightness	1000 cd/m²						
Resolution	3840x540						
Aspect ratio	16:2.2						
Contrast ratio	TBD						
Pixel pitch (mm)	0.2854 (H) x 0.2854 (V)						
Pixel per inch (PPI)	89						
Viewing angle	178° (H), 178° (V)						
Color saturation (NTSC)	TBD						
Display colors	1.07G						
Response time (Typical)	9.5ms						
Video interface	V-by-One		DVI-D, HDMI, DP				
Input power			AC 100~240V				
Power consumption	TBD		TBD				
Dimensions (mm)	1121.7x184.8x21.6		1121.7x184.8x21.6			1124.3x187.4x64.6	
Bezel size (U/B/L/R)	13.3/13.3/10.9/10.9		13.3/13.3/10.9/10.9			14.6/14.6/12.2/12.2	
Weight (Net)	4.8kg		4.8kg			8.8kg	
Mounting						VESA 300x75	
OSD key			4 keys (Power switch, menu, +, -)				
OSD control			Brightness, color, contrast, H/V position... etc				
Operating temperature	0°C ~ +50°C						
Storage temperature	-20°C ~ +60°C						
Product approval						CE, FCC	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4355-INU-A01	43.5",1000nits,3840x540,LID43,3in1,V1
SSH4355-INU-M01	43.5",1000nits,3840x540,LID43,AD9131DHPA,AC100~240V,3in1,V1
SSD4355-INU-M01	43.5",1000nits,3840x540,LID43,AD9131DHPA,O/B,Speaker*2,AC100~240V,V1

4485-I

44.8" Resizing LCD, 1000 nits LED backlight, 3840x1080



Key Features

- 44.8" LCD
- Stretched display (aspect ratio of 16 : 4.5)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 3840 x 1080
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours



Sunlight
Readable



Stretched
Display



MaxRGB



4K2K

Specifications

	SSF4485-INU		SSH4485-INU			SSD4485-INU	
Description	44.8" Resizing LCD, 1000 nits LED backlight, 3840x1080						
Screen size	44.8"						
Display area (mm)	1095.84(H) x 308.23 (V)						
Brightness	1000 cd/m²						
Resolution	3840x1080						
Aspect ratio	16:4.5						
Contrast ratio	TBD						
Pixel pitch (mm)	0.2854 (H) x 0.2854 (V)						
Pixel per inch (PPI)	89						
Viewing angle	178° (H), 178° (V)						
Color saturation (NTSC)	TBD						
Display colors	1.07G						
Response time (Typical)	9.5ms						
Video interface	V-by-One		DVI-D, HDMI, DP				
Input power			AC 100~240V				
Power consumption	TBD		TBD				
Dimensions (mm)	1121.7x338.9x21.6		1121.7x338.9x21.6			1124.3x341.5x64.6	
Bezel size (U/B/L/R)	13.3/13.3/10.9/10.9		13.3/13.3/10.9/10.9			14.6/14.6/12.2/12.2	
Weight (Net)	9.4kg		9.4kg			16.2kg	
Mounting						VESA 300x75	
OSD key			4 keys (Power switch, menu, +, -)				
OSD control			Brightness, color, contrast, H/V position... etc				
Operating temperature	0°C ~ +50°C						
Storage temperature	-20°C ~ +60°C						
Product approval						CE, FCC	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4485-INU-A01	44.8", 1000nits, 3840x540, LID44, 3in1, V1
SSH4485-INU-M01	44.8", 1000nits, 3840x540, LID43, AD9131DHPA, AC100~240V, 3in1, V1
SSD4485-INU-M01	44.8", 1000nits, 3840x540, LID43, AD9131DHPA, O/B, Speaker*2, AC100~240V, V1

4788-A

47.8" Resizing LCD, 1600 nits LED backlight, 1920x178



TAXI



Key Features


- eSATA LCD
- Stretched display (aspect ratio of 16 : 1.5)
- Sunlight readable, high brightness (1,600 nits)
- Resolutions: 1920 x 178
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF
100,000 Hrs

Specifications

	SSF4788-A	SSH4788-A		SSD4788-A
Description	47.8" Resizing LCD, 1600 nits LED backlight, 1920x178			
Screen size	47.8"			
Display area (mm)	1209.6(H) x 112.1(V)			
Brightness	1600 cd/m²			
Resolution	1920x178			
Aspect ratio	16:1.5			
Contrast ratio	8000:1			
Pixel pitch (mm)	0.63 (H) x 0.63 (V)			
Pixel per inch (PPI)	40			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	81%			
Display colors	16.7M			
Response time (Typical)	6.5ms			
Video interface	LVDS	VGA,DVI-D,HDMI		
Input power		DC 12V		
Power consumption	52w	57w		
Dimensions (mm)	1244.6x151.5x23.9	1244.6x151.5x23.9		1247.2x154.1x62.9
Bezel size (U/B/L/R)	17.7/17.7/15.5/15.5	17.7/17.7/15.5/15.5		19/19/16.8/16.8
Weight (Net)	4kg	4.2kg		6.6kg
Mounting				VESA 400x75
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4788-ANN-A01	47.8",1600nits,1920*178,LID47A.4in1,V1
SSH4788-ANN-G01	47.8",1600nits,1920*178,LID47A.AD2662GDHM,4 in 1,V1
SSD4788-ANB-G01	47.8",1600nits,1920*178,LID47A.AD2662GDHM,DC 12V,2 in 1,V1

4848-A

48.4" Resizing LCD, 1600 nits LED backlight, 1920x358



TAXI



Key Features

- e-ink LCD
- Stretched display (aspect ratio of 16:3)
- Sunlight readable, high brightness (1,600 nits)
- Resolutions: 1920 x 358
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 70,000 hours



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF
70,000 Hrs

Specifications

	SSF4848-A		SSH4848-A			SSD4848-A	
Description	48.4" Resizing LCD, 1600 nits LED backlight, 1920x358						
Screen size	48.4"						
Display area (mm)	1209.6(H) x 225.5(V)						
Brightness	1600 cd/m²						
Resolution	1920x358						
Aspect ratio	16:3						
Contrast ratio	8000:1						
Pixel pitch (mm)	0.63 (H) x 0.63 (V)						
Pixel per inch (PPI)	40						
Viewing angle	178° (H), 178° (V)						
Color saturation (NTSC)	80%						
Display colors	16.7M						
Response time (Typical)	8.5ms						
Video interface	LVDS		VGA, DVI-D, HDMI				
Input power			AC 100~240V				
Power consumption	78w		83w				
Dimensions (mm)	1244.6x264.9x27.6		1244.6x264.9x27.6			1247.5x268x66.6	
Bezel size (U/B/L/R)	17.7/17.7/15.5/15.5		17.7/17.7/15.5/15.5			19.3/19.3/17/17	
Weight (Net)	9kg		9kg			11.5kg	
Mounting						VESA 400x100, 800x100	
OSD key			4 keys (Power switch, menu, +, -)				
OSD control			Brightness, color, contrast, H/V position... etc				
Operating temperature	0°C ~ +50°C						
Storage temperature	-20°C ~ +60°C						
Product approval						CE, FCC	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information


SSF4848-ANN-A02	48.4",1600nits,1920*358,LID48A.2 in 1,V01
SSH4848-ANN-G02	48.4",1600nits,1920*358,LID48A.AD2662GDHMMVAR,speaker*2.AC100~240V,2 in 1,V01
SSD4848-ANB-G01	48.4",1600nits,1920*358,LID48A.AD2662GDHMMVAR,speaker*2.O/B,AC100~240V,V01

4956-A

49.5" Resizing LCD, 1200 nits LED backlight, 1920x538



TAXI

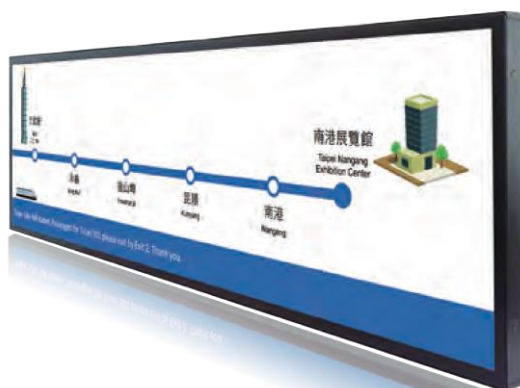

Key Features

- Resizing LCD
- Stretched display (aspect ratio of 16:4.5)
- Sunlight readable, high brightness (1,200 nits)
- Resolutions: 1920 x 538
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 70,000 hours



Sunlight
Readable



Stretched
Display



Wide Viewing
Angle



MTBF
70,000 Hrs

Specifications

	SSF4956-A	SSH4956-A		SSD4956-A
Description	49.5" Resizing LCD, 1200 nits LED backlight, 1920x538			
Screen size	49.5"			
Display area (mm)	1209.6(H) x 338.94(V)			
Brightness	1200 cd/m²			
Resolution	1920x538			
Aspect ratio	16:4.5			
Contrast ratio	9700:1			
Pixel pitch (mm)	0.63 (H) x 0.63 (V)			
Pixel per inch (PPI)	40			
Viewing angle	178° (H), 178° (V)			
Color saturation (NTSC)	80%			
Display colors	16.7M			
Response time (Typical)	6.5ms			
Video interface	LVDS	VGA,DVI-D,HDMI		
Input power		AC 100~240V		
Power consumption	93w	104w		
Dimensions (mm)	1244.6x378.7x27.6	1244.6x378.7x27.6		1247.5x381.5x66.6
Bezel size (U/B/L/R)	17.9/17.9/15.5/15.5	17.9/17.9/15.5/15.5		19.3/19.3/17/17
Weight (Net)	11.4kg	11.5kg		18.4kg
Mounting				VESA 400x100, 800x100
OSD key		4 keys (Power switch, menu, +, -)		
OSD control		Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C			
Storage temperature	-20°C ~ +60°C			
Product approval				CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4956-ANN-A01	49.5",1200nits,1920*538,LID49A,V01
SSH4956-ANN-G01	49.5",1200nits,1920*538,LID49A.AD2662GDHMMVAR,speaker*2.AC100~240V,V01
SSD4956-ANB-G01	49.5",1200nits,1920*538,LID49A.AD2662GDHMMVAR,speaker*2.O/B,AC100~240V,V01

SCD2735-A

27.3" two resizing LCD, 1000 nits LED backlight, 945x1080



Double Side Display



Sunlight Readable



Stretched Display



Wide Viewing Angle



Key Features

- 27.3", double-sided LCD
- Square display (aspect ratio of 8 : 9)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 945 x 1080
- High contrast ratio (3000:1)
- Wide viewing angle of 178° (H), 178° (V)
- BL MTBF: 70,000 hours

Specifications

SCD2735-A	
Description	27.3" two resizing LCD, 1000 nits LED backlight, 945x1080
Screen size	27.3"
Display area (mm)	457.85(H) x 523.26(V)
Brightness	1000 cd/m ²
Resolution	945x1080
Aspect ratio	8:9
Contrast ratio	3000:1
Pixel pitch (mm)	0.4845 (H) x 0.4845 (V)
Pixel per inch (PPI)	52
Viewing angle	178° (H), 178° (V)
Color saturation (NTSC)	80%
Display colors	16.7M
Response time (Typical)	6.5ms
Video interface	VGA, DVI-D, HDMI
Input power	AC 100~240V
Power consumption	100w
Dimensions (mm)	649.5x571.9x368
Bezel size (U/B/L/R)	22/22/27.5/27.5
Weight (Net)	18.5kg
Mounting	VESA 346x65
OSD key	4 keys (Power switch, menu, +, -)
OSD control	Brightness, color, contrast, H/V position... etc
Operating temperature	0°C ~ +50°C
Storage temperature	-20°C ~ +60°C
Product approval	CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SCD2735-ANN-G01	27.3"*2,1000nits,945*1080.LID27A,AD2662GDHMA.speaker*2,OSD,AC 100~240V.V01

SSC2845-E

28" two resizing LCD, 1000 nits LED backlight, 1920x357



Double Side Display



Sunlight Readable



Stretched Display



Wide Viewing Angle

Key Features

- 28" long, double-sided LCD
- Stretched display (aspect ratio of 16 : 3)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 357
- High contrast ratio (6800:1)
- Wide viewing angle of 178° (H), 178° (V)
- BL MTBF: 70,000 hours

Specifications

SSC2845-E

Description	28" two resizing LCD, 1000 nits LED backlight, 1920x357
Screen size	28"
Display area (mm)	698.4(H) x 129.8(V)
Brightness	1000 cd/m ²
Resolution	1920x357
Aspect ratio	16:3
Contrast ratio	6800:1
Pixel pitch (mm)	0.3637 (H) x 0.3637 (V)
Pixel per inch (PPI)	70
Viewing angle	178° (H), 178° (V)
Color saturation (NTSC)	80%
Display colors	16.7M
Response time (Typical)	8ms
Video interface	VGA,DVI-D,HDMI
Input power	AC 100~240V
Power consumption	76w
Dimensions (mm)	1250.9x368x40
Bezel size (U/B/L/R)	22/22/25/25
Weight (Net)	12kg
Mounting	VESA 346x65
OSD key	4 keys (Power switch, menu, +, -)
OSD control	Brightness, color, contrast, H/V position... etc
Operating temperature	0°C ~ +50°C
Storage temperature	-20°C ~ +60°C
Product approval	CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSC2845-ENN-G01	28" *2,1000nits,1920*357.LID28A,AD2662GDHMA.speaker*2,OSD,Portrait.AC100~240V input,V1

SSC2925-E

29.3" two resizing LCD, 1000 nits LED backlight, 1366x512



Double Side Display



Sunlight Readable



Stretched Display



Wide Viewing Angle

Key Features

- 29.3", double-sided LCD
- Stretched display (aspect ratio of 16 : 6)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1366 x 512
- High contrast ratio (2500:1)
- Wide viewing angle of 176° (H), 176° (V)
- BL MTBF: 70,000 hours

Specifications

SSC2925-E

Description	29.3" two resizing LCD, 1000 nits LED backlight, 1366x512
Screen size	29.3"
Display area (mm)	697.68(H) x 261.5(V)
Brightness	1000 cd/m ²
Resolution	1366x512
Aspect ratio	16:6
Contrast ratio	2500:1
Pixel pitch (mm)	0.51075 (H) x 0.51075 (V)
Pixel per inch (PPI)	50
Viewing angle	176° (H), 176° (V)
Color saturation (NTSC)	80%
Display colors	16.7M
Response time (Typical)	6.5ms
Video interface	VGA, DVI-D, HDMI
Input power	AC 100~240V
Power consumption	108w
Dimensions (mm)	1254.9x368x37
Bezel size (U/B/L/R)	25.7/25.7/23.1/23.1
Weight (Net)	17kg
Mounting	VESA 346x65
OSD key	4 keys (Power switch, menu, +, -)
OSD control	Brightness, color, contrast, H/V position... etc
Operating temperature	0°C ~ +50°C
Storage temperature	-20°C ~ +60°C
Product approval	CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSC2925-ENN-G01	29.3" *2,1000nits,1366*512.LID29A,AD2662GDHMA.Speaker*2,OSD,Portrait,OSD.AC100~240V input,V1.

SSC3825-E

38" two resizing LCD, 1000 nits LED backlight, 1920x502



Double Side Display



Sunlight Readable



Stretched Display



Wide Viewing Angle

Key Features

- Resizing, double-sided LCD
- Stretched display (aspect ratio of 16 : 4.2)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 502
- High contrast ratio (7000:1)
- Wide viewing angle of 176° (H), 176° (V)
- BL MTBF: 70,000 hours

Specifications

SSC3825-E	
Description	38" two resizing LCD, 1000 nits LED backlight, 1920x502
Screen size	38"
Display area (mm)	930.2(H) x 243.2(V)
Brightness	1000 cd/m ²
Resolution	1920x502
Aspect ratio	16:4.2
Contrast ratio	7000:1
Pixel pitch (mm)	0.4845 (H) x 0.4845 (V)
Pixel per inch (PPI)	52
Viewing angle	176° (H), 176° (V)
Color saturation (NTSC)	80%
Display colors	16.7M
Response time (Typical)	6.5ms
Video interface	VGA,DVI-D,HDMI
Input power	AC 100~240V
Power consumption	121w
Dimensions (mm)	1482.39x368x39.4
Bezel size (U/B/L/R)	22.5/22.5/22/22
Weight (Net)	21kg
Mounting	VESA 346x65
OSD key	4 keys (Power switch, menu, +, -)
OSD control	Brightness, color, contrast, H/V position... etc
Operating temperature	0°C ~ +50°C
Storage temperature	-20°C ~ +60°C
Product approval	CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSC3825-ENN-G01	38"*2,1000nits,1920*502.LID38A,AD2662GDHMA.speaker*2,OSD,Portrait.AC100~240V input,V1



Taiwan

Industrial Display DV.

8F, No. 137, Ln 235,
Baoqiao Rd., Xindian Dist.,
New Taipei City 23145, Taiwan

T +886-2-8919-1858

F +886-2-8919-1300

sales@litemax.com

<http://www.litemax.com>

Taiwan

Industrial Computing DV.

15F.-2, No.239, Sec.1,
Datong Rd., Xizhi Dist.,
New Taipei City 22161, Taiwan

T +886-2-8642-3777

F +886-2-8642-3737

info@wynmax.com.tw

<http://www.wynmax.com.tw>

China

Beijing

Room 606, Block D Jia Hua Building,
NO.9 Shang Di San Street,
Hai Dian District, Beijing, China

T +86-10-82780421

F +86-10-82780421

China

Shanghai

20F, Unit D, Building 20,
GEM Building, No.487 Tianlin Road,
Xuhui District, Shanghai, China

T +86-21-64956621

M +86-13818264122

Europe

Germany

Julius-Faucher-Str.31,
28307 Bremen, Germany

T +49-421-565-6811

F +49-421-565-6810

USA

California

48531 Warm Springs Blvd, #414,
Fremont, CA94539, USA

T +1-510-5097506

usa@litemax.com

