1020YV 10.1" LED LCD Monitor w/ VGA & AV Inputs



Description

Xenarc Technologies Corp. was the first to introduce a 10.1" LED LCD screen with VGA input, and now we have further improved this popular model by incorporating the latest LED backlight technology. In addition, Solid Capacitors are used in place of Electrolytic Capacitors though out the unit to further improve the stability and durability especially in extreme temperature conditions.

Don't mistake this monitor for an ordinary video monitor that displays composite video. This 10.1" monitor has 1024 x 600 pixels (3072 x 600 sub-pixels) that help display crystal clear text and ultrasharp images through your computer's VGA signal.


The brushed, anodized aluminum face plate gives the display a futuristic yet elegant look. The entire enclosure is constructed with aluminum, making the unit both strong and light weight and the thin profile (only 1.19") makes the display very space saving.

Features

- For In-Car Computing, PC, Server, GPS, and various VGA Use
- VGA Input (15 pin D-SUB) x 1 & Video Input x 2
- Audio Input x 3 / Built-in Speakers
- NTSC / PAL Multi-System
- 16x9 Aspect Ratio

- Upgraded High-Brightness LED Backlight
- Ultra High Resolution 1024 x 600 Native
- Solid Capacitors for improved durability
- Automatic backlight level adjustment through built-in ambient light sensor
- Pixelworks High Performance Image and Video Signal Processor
- AISS Advanced Image-Scaling and Shaping
- Last Input memory
- Last Power setting memory
- IR Remote Control
- Auto power-on upon signal detection
- Automatic display adjustment
- On Screen Display Control
- Mirror Image Flip
- Vertical Image Flip
- Function to disable front button(s)
- Function to disable On Screen Text
- AV2 Auto Switching for backup camera
- Desktop Stand: 360° Adjustment
- U-Shape mounting bracket
- VESA 75mm mounting holes
- 26-Pin heavy-duty connector
- Anti Glare Coating
- · Brushed, anodized aluminum face plate
- Aluminum Casing
- Supports 10V DC ~ 30V DC
- "E" Mark Certified for Automotive use

Function Diagram

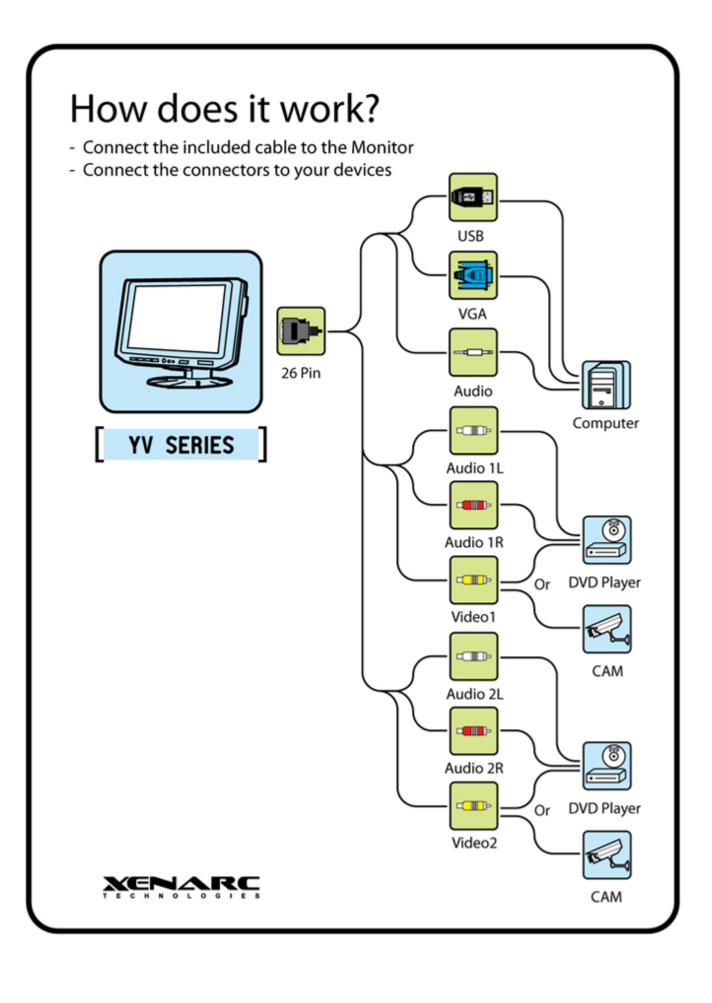

Package Contents

- Copper Monitor Stand or U-Shape Mount
- AC Adaptor or Cigarette Lighter Car Adaptor
- 1.8M Connection Cable (5M version available separately)

Specification

- Screen Size: Diagonal 10.1" (16:9)
- Physical Resolution: 1024 (H) x 600 (V) WXGA
- Supported Resolution: 640 x 480 ~ 1920 x 1080
- Dot Resolution: 3072 x 600 = 1,843,200 (dots)
- Brightness: 400 cd/m²
- Contrast Ratio: 500:1
- Viewing Angle: 140° Horizontal, 110° Vertical
- Response Time (Tr/Tf): 5/20ms (Typ.)
- Operating Voltage Range: DC 10V ~ 30V
- Power Supply: DC 12V
- Power Consumption: ? 20W
- Operating Temperature: -4°F ~ 158°F (-20°C ~ 70°C)
- Storage Temperature: -22°F ~ 176°F (-30°C ~ 80°C)
- Dimension (mm): 265W x 186H x 33.2D
- Weight (lb): 3.2
- FCC, CE, E13 Certification
- ROHS Compliant
- 24 Month Warranty
- 30 days No dead Pixel Guarantee