



7 inch IPS Camera-top Monitor

- 1280x800 Resolution
- 400cd/m² Brightness
- 800:1 Contrast
- 17mm Ultra-thin Design
- 4:3&16:9 image adjustable
- Camera 5D II Mode
- Pixel to Pixel
- Screen & Center Marker
- DSLR Scale
- With HDMI Plug Lock



1280x800 resolution	400cd/m ² brightness	Peaking Filter	Image Flip	Check Field	Zoom-in

PRODUCT DESCRIPTION




- | | | | |
|------------------------------|------------------------|--------------|-------------------------------------|
| 1.USB for Upgrade | 3. 3.5mm Earphone Jack | 5.HDMI input | 7.F970 battery plate |
| 2.Wire remote OSD controller | 4. Audio,Video | 6.DC input | 8.Install Way:1/4"-20 Thread Socket |

FEATURE

- Check Field
- Image Flip
- Center Marker
- Zoom in
- HDMI Lock
- Camera Mode
- Pixel to Pixel
- Frame Maker
- Camera
- Peaking Focus Assist


CHECK FIELD

Check field function has 4 modes: Mono,R,G,B.

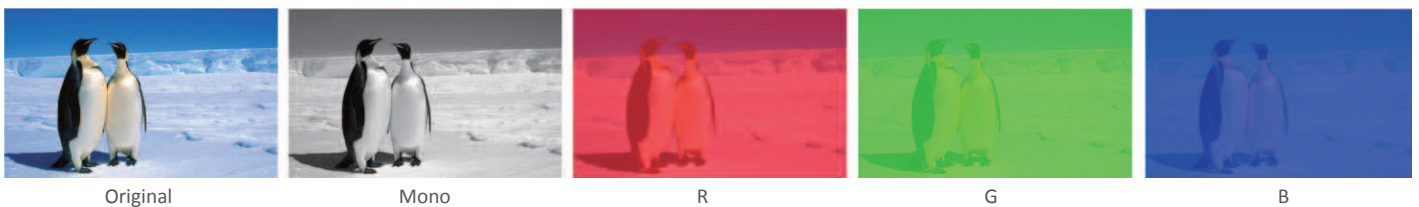


Camera Mode

It will be full screen and no delay,stretch or blink screen under camera mode.

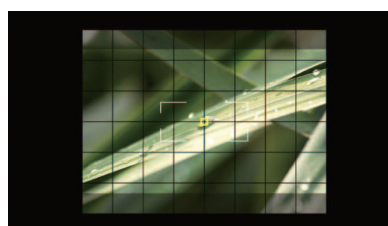

Normal mode

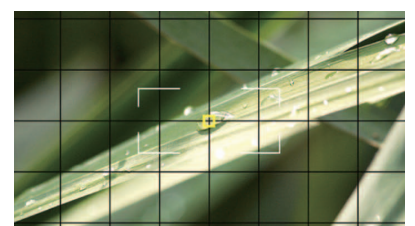

Full screen




Peaking

The operator adjusts the focus control until the red outlines on the desired area are clear, indicating optimal focus. For the best results, be sure the subject is properly exposed. Enjoy taking your photos!



Subject in focus with Filter off



Subject in focus with Filter on



Subject out-focus with Filter off



Subject out-focus with Filter on

Image flip



Original Image



Image Flip horizontally



Image Flip vertically



Image Flip H/V

HDMI Lock

In order to avoid affecting the shooting from bad connection While use HDMI format for HD signal transmission (actually this problem happens frequently), there fore, we specially designed HDMI lock to ensure the safety of signal transmission.



HDMI Mode Support

Format	Signal
HDMI	480i/576i/480p/576p 1080i (60/59.94/50) 720p (60/59.94/50/30/29/25/24/23.98) 1080p(60/59.94/50/30/29.97/25/24/24fps/23.98/23.98fps)

Accessories



HDMI cable



Sunshade



HDMI plug lock



Shoe Mount



F970 Plate



Manual

SPECIFICATIONS

Model No.	CL759HP
LCD Size	7 inch
Resolution	1280 x 800
Aspect Ratio	16:10
Brightness	400cd/m ²
Contrast	800:1
Backlight	LED
Viewing Angle	89°/ 89°(L/R) 89°/ 89°(U/D)
Signal Input	Video, Audio, HDMI
Signal Output	Wire Remote OSD controller 3.5mm Audio Built-in Speaker
Power consumption	≤5w
Input Voltage	7.4~35V
Working Temperature	-20 ~ 50 °C
Storage Temperature	-30 ~ 60 °C
Install Way	1/4"-20 Thread Socket(1 bottom side)
Battery	F970
Size:(LWD)	176mmx130mmx17 mm
Weight	400g
Certification	FCC, CE, RoHS