
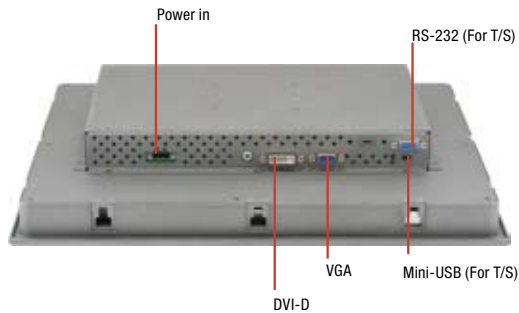


# AGD-317D

17" SXGA Rugged Touch Display

07

Industrial Touch Display Solutions

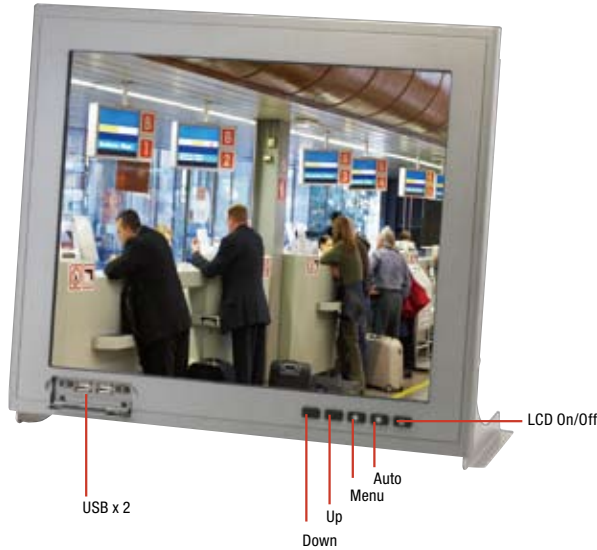

## Features

- 17" SXGA (1280 x 1024) TFT LCD Display
- IP-65 Aluminum Die Cast Front Bezel
- Supports 5-wire Resistive Touch Screen
- Easy-To-Maintain: Two Front USB Ports
- Power Protection:
  - Over-Voltage Protection
  - Under Voltage Protection
  - Reverse Protection
- Flexible Interfaces:
  - DVI/VGA For Video Input
  - RS-232/ Mini-USB For Touch Screen




## Specifications

System	
Input Signal	VGA/DVI
On Screen Display Control	MENU, AUTO, LCD On/Off, UP, DOWN
I/O Connector	VGA/DVI, RS-232/ mini-USB (For T/S), DIP Switch, USB x 2 (on front panel) (AGD-317DHTT-A2)
OS Support	Windows® XP, Windows® 7, Linux Fedora
Mechanical	
Construction	IP-65/ NEMA4 for aluminum die cast front bezel & steel chassis
Mounting	Panel/ Rack/ VESA 75/100/ Wall/ Desktop
Dimension	16.54" x 14.1" x 2.84" (420mm x 358mm x 72mm)
Carton Dimension	26" x 19.53" x 7.87" (661mm x 496mm x 200mm)
Gross Weight	18.59 lb (8.45 Kg)
Net Weight	14.3 lb (6.5 Kg)
Environmental	
Operating Temperature	32°F ~122°F (0°C~50°C)
Storage Temperature	-4°F ~ 140°F (-20°C~60°C)
Storage Humidity	10%~95% @ 40°C; non-condensing
Vibration	1 g rms/ 5~500Hz/ Random operation
Shock	15 G peak acceleration (11 msec. Duration)
EMC	CE/FCC Class A
Power Supply	
DC Input	9~30V DC, w/3-pin terminal block Over-voltage (31V DC) Under-voltage (8V DC) Reverse protection Surge protection (1000V DC)
LCD	
Display Type	17" TFT-LCD
Max Resolution	1280x 1024
Max. Colors	16.7M colors (6/8-bit for R,G,B)
Luminance	380 cd/m <sup>2</sup>
Viewing Angle	170°(H), 160°(V)
Back Light	CCFL
Back Light MTBF (hours)	50,000
Touchscreen	
Type	5-wire Resistive
Light Transmission	80%
Lifetime (Times)	35 million activations

# AGD-317D

## Dimension

Unit: mm

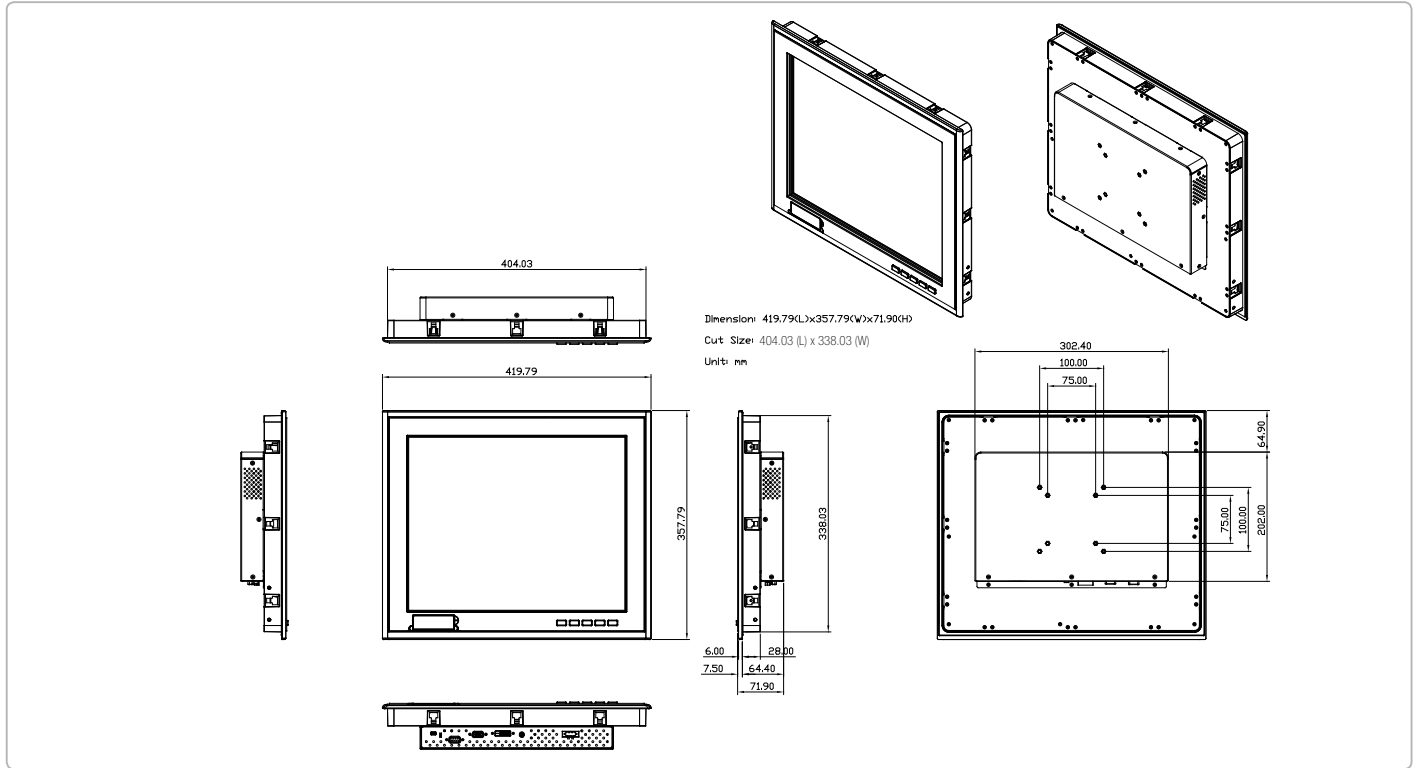

## Ordering Information

Part Number	Display Type	Max Resolution	Luminance	View Angle	Backlight MTBF (Hours)	Display	Mounting	Power	Temp.	Touch	Other
TF-AGD-317DHTT-A1-1010	17" TFT-LCD	1280 x 1024	380 cd/m <sup>2</sup>	170(H), 160(V)	50,000	VGA x 1 DVI x 1	Panel/VESA 75/100/Wall	DC 9-30V	0-50 C (w/o air)	5-wire resistive	Without USB x 2 in the front
TF-AGD-317DHTT-A2-1010	17" TFT-LCD	1280 x 1024	380 cd/m <sup>2</sup>	170(H), 160(V)	50,000	VGA x 1 DVI x 1	Panel/VESA 75/100/Wall	DC 9-30V	0-50 C (w/o air)	5-wire resistive	With USB x 2 in the front

## Packing List

- VGA Cable
- USB Cable
- RS-232 Cable
- CD-ROM for Manual (in PDF Format) and Drivers
- AGD-317D

## Optional Accessories

- **1700151806**  
VGA Cable, 180cm
- **1709051000**  
Mini-USB to USB Type A for Touch Screen
- **1700091800**  
DB-9, 180cm, RS-232 For Touch Screen
- **9761317502**  
Rackmount Kit for AGD-317D
- **1757908401**  
AC/DC 12V Power Adapter, 84W
- **1702031802**  
Power Cord (US Type)
- **1702031803**  
Power Cord (European Type)
- **170203180E**  
Power Cord (Japanese Type)