

# VariPOS 615

15" All-in-One Stylish POS System



Module Design for Integration



Chic Slim & Small Footprint




Multi-Color Options

# SPECIFICATION

| Model Name                    |                       | VariPOS 615  |  |
|-------------------------------|-----------------------|--|--|
| <b>Main Spec</b>              | CPU                   | Intel® Pineview D410 (Single Core) 1.66GHz<br>Intel® Pineview D510 (Dual Core) 1.66GHz   | Intel® Core i5 2.5GHz<br>Intel® Core i3 2.2GHz<br>Intel® Mobile Celeron B810 1.6GHz  |
|                               | Chipset               | Intel® Pineview + ICH8M  | Intel HM65   |
|                               | System Memory         | 1 x SO-DIMM DDRII 667, up to 2GB   | 1 x SO-DIMM DDRIII 1333, up to 8GB   |
| <b>Display</b>                | TFT LCD               | 15" CCFL   | 15" CCFL   |
|                               | Brightness            | 250nits  | 250nits  |
|                               | Resolution            | 1024 x 768   | 1024 x 768   |
|                               | Touch Screen          | True Flat Projected Capacitive Technology<br>True Flat 5-Wire Resistive  | True Flat Projected Capacitive Technology<br>True Flat 5-Wire Resistive  |
| <b>Storage</b>                | HDD Type              | 1 x SATA 6.4cm (2.5")HDD   | 1 x SATA 6.4cm (2.5")HDD   |
|                               | SSD Type              | 1 x SATA 6.4cm (2.5") SSD (optional)   | 1 x SATA 6.4cm (2.5") SSD (optional)   |
|                               | Compact Flash Type    | 1 x Slot Type II (Standard)  | N/A  |
| <b>I/O Ports - External</b>   | DC Input              | 1 x Mini Din 4P (DC 12V only)  | 1 x Mini Din 4P (DC 12V only)  |
|                               | Cash Drawer           | 1 x RJ-11 (Power Pin 12V)  | 1 x RJ-11 (Power Pin 12V)  |
|                               | Network (LAN)         | 1 x Gigabit Ethernet by RJ-45  | 1 x Gigabit Ethernet by RJ-45  |
|                               | USB Port              | 4 x USB 2.0  | 4 x USB 2.0  |
|                               | Serial Port           | 4 x RS-232 w/ RJ/5V/12V power<br>(COM1/2: DB-9, COM3 : RJ-48, COM 4: DB-9 [optional] )   | 4 x RS-232 w/ RJ/5V/12V power<br>(COM1/2: DB-9, COM3/4 : RJ-48 )   |
|                               | Audio                 | 1 x Line-out ; 1 x Mic-In (optional)   | 1 x Line out / MIC in  |
|                               | PS/2 Port             | 1 x PS/2 Keyboard  | 1 x PS/2 Keyboard  |
|                               | LPT Port              | 1 x DB-25 Printer Port (Standard)  | 1 x DB-25 Printer Port (Standard)  |
|                               | VGA Port              | 1 x DB-15 VGA Port (optional)  | 1 x DB-15 VGA Port (optional)  |
| <b>I/O Ports - Internal</b>   | Card Reader & iButton | COM5 : Internal Pin header for Card Reader & iButton   | COM5 : Internal Pin header for Card Reader & iButton   |
|                               | Audio                 | HD Audio compliant, 2W Speaker x 2   | HD Audio compliant, 2W Speaker x 2   |
|                               | Bus Expansion         | 1 x Mini-PCI-E Slot  | 1 x Mini-PCI-E Slot  |
| <b>Compliance</b>             |                       | IP 66 on front panel   | IP 66 on front panel   |
| <b>System Management</b>      |                       | Desktop Management Interface (DMI)/<br>Preboot Execution Environment (PXE) /Wake on LAN (WoL)<br>Advanced Configuration and Power Interface (ACPI) | Desktop Management Interface (DMI)/<br>Preboot Execution Environment (PXE) /Wake on LAN (WoL)<br>Advanced Configuration and Power Interface (ACPI) |
| <b>OS Support</b>             |                       | Windows 7, Windows POSReady,<br>Windows XP Pro for Embedded, Fedora(Linux)   | Windows 7, Windows POSReady,<br>Windows XP Pro for Embedded, Fedora(Linux)   |
| <b>Power Supply</b>           |                       | 80 Watts, Voltage:+12VDC 6.6A max.   | 120 Watts, Voltage:+12VDC 10A max.   |
| <b>Material</b>               |                       | Main Unit: Die-casting aluminum ; I/O Cover:Plastic  | Main Unit: Die-casting aluminum ; I/O Cover:Plastic  |
| <b>Color</b>                  |                       | Main Unit: Gray / Black / White  | Main Unit: Gray / Black / White  |
| <b>Certifications</b>         |                       | CE, FCC, Class-A, RoHS, WEEE   | CE, FCC, Class-B, RoHS, WEEE   |
| <b>Dimension( W x H x D )</b> |                       | 370 x 249 x 275 mm   | 370 x 249 x 275 mm   |
| <b>Weight</b>                 |                       | 5.18 Kg  | 5.46 Kg  |
| <b>Operating Temperature</b>  |                       | 0°C ~ 40°C, 10% ~ 90% RH, non-condensing   | 0°C ~ 40°C, 10% ~ 90% RH, non-condensing   |
| <b>Storage Temperature</b>    |                       | -20°C ~ 60°C, 10% ~ 90% RH, non-condensing   | -20°C ~ 60°C, 10% ~ 90% RH, non-condensing   |

\* The right has been reserved to change the specification without prior notice.

## DIMENSION

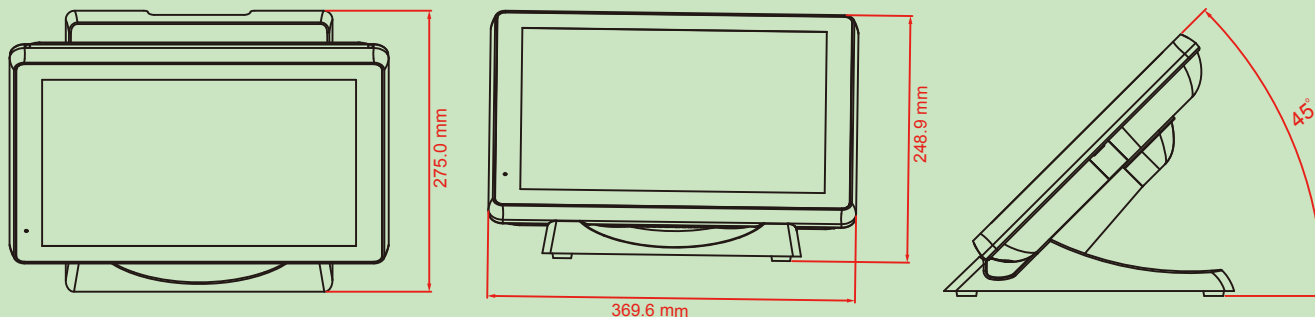

# Poindus

## Poindus Systems Corp.

Address: 6F., No. 1, Lane. 28, Xingzhong Rd., Neihu Dist.,  
Taipei City 114, Taiwan(R.O.C.)

Tel:+886-2-77214688 Fax:+886-2-77212289 E-mail:sales@poindus.com