

ASB200-895

Slim Type System for IBASE IB895
3.5" Disk-Size SBC



SBC System



Specifications

System Mainboard	IB895 / IB895N
CPU Type	Intel® Atom™ Processor D2550 / N2600
System Speed	1.86GHz / 1.6GHz
Memory	1x DDR3 SO-DIMM, Max. 4GB (Intel® Atom™ D2550) 1x DDR3 SO-DIMM, Max. 2GB (Intel® Atom™ N2600)
Construction	Aluminum & Steel
Chassis Color	Black
Front Panel External I/O	Power LED, HDD LED, Reset button, On/Off button , Mic-in, Line-out, 4x USB ports, 3x COM port
Rear Panel External I/O	1x DVI-I, 2x USB ports, 1x COM, 2x RJ-45 connector, DC-in jack
Storage	1x 2.5" HDD or SSD
Power Supply	60W power adaptor
Mounting	Desktop or wall mount(wall mount kit included)
Dimensions	240mm(W) x 162mm(D) x 37mm(H)
Operating Temperature	0°C~ 45°C (32°F~113°F)
Storage Temperature	-20°C ~ 80°C (-4°F~176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	TBC

Features


- Fanless system supports IBASE IB895 3.5-inch SBC
- Onboard Intel® Atom™ Processor D2550, 1.86 GHz
- iSMART - auto-scheduler and power resume
- EuP/ErP power saving
- One 2.5" SATA storage device
- Available in black coating color
- Wall mount kit included
- 12V ~24V DC wide range power input

Ordering Information

ASB200-895 Aluminum Chassis for IB895 3.5" SBC, Intel® Atom™ D2550 (1.86GHz) CPU, 2.5" 250GB SATA HDD, 2GB DDR3 memory, 60W power adaptor

ASB200-895N Aluminum Chassis for IB895 3.5" SBC, Intel® Atom™ N2600 (1.6GHz) CPU, 2.5" 250GB SATA HDD, 2GB DDR3 memory, 60W power adaptor

Dimensions

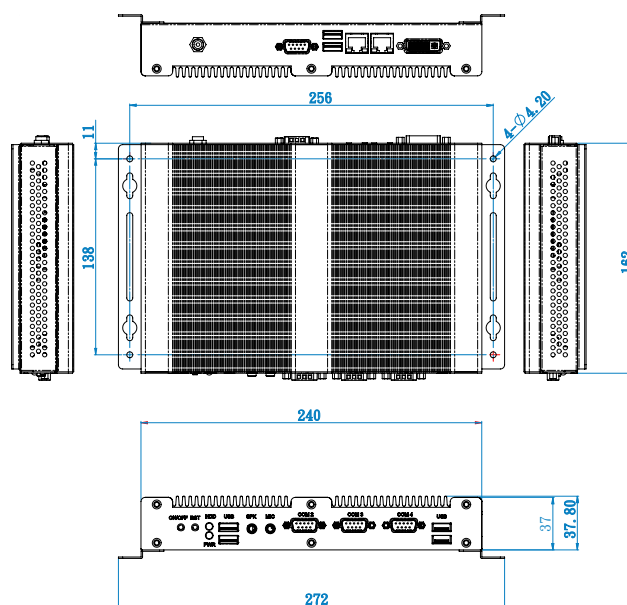

01
Motherboards

02
Disk-Size SBCs

03
CPU Modules

04
PC 104 Plus

05
CPU Cards

06
RISC SBCs

07
Embedded Systems