

CSB110-902

Compact Embedded PC with 3rd Generation Intel® Core™ i7/i5/i3/ Celeron® QC/DC Processors



SBC System



Features

- Supports 3rd Generation Intel® Core™ i7/i5/i3/ Celeron® QC/DC Processors
- 2x DDR3 SO-DIMM, Max. 16GB
- Intel® HD Graphics Engine
- 2x USB 3.0 ports
- 1x Mini PCI-E(x1) expansion slot
- WatchDog timer
- iSMART - for Auto-scheduler and power resume


Specifications

System Mainboard	IB902
CPU Type	3rd Generation Intel® Mobile Core™ i7/i5/i3/ Celeron® QC/ DC processors (TDP <= 35W)
CPU Package	rPGA988B for 3rd Generation Intel® Core™ i7/i5/i3/ Celeron® QC/ DC processors
Chipset	Intel® HM76 PCH
Memory	2x DDR3 1066/1333/1600 MHz SO-DIMM, Max. 16GB (Non-ECC)
Graphics	Intel® HD Graphics supports OpenGL 3.0 DirectX® 11 OpenCL 1.1 MFX Hardware Video Decoder – MPEG-2, AVC, VC-1, JPEG
LAN	1x Intel® 82579V Gigabit LAN controller
Expansion Slots	1x Mini PCI-E(x1) slot for Wi-Fi, Bluetooth options
I/O Interface	1x HDMI, 1x DVI-I 1x Line-Out, 1x Line-In, 1x Mic-In 1x Gigabit LAN, 2x USB 3.0 1x RS-232 (RJ45 connector) 1x Power button with LED light, 1x DC jack
Auto Control and Monitoring	256 segments, 0, 1, 2...255 (sec/min)
Power Requirement	+12V DC-in
Construction	SGCC
Weight	1.2Kg
Chassis Color	Black
Storage	1x mSATA, 1x SATA 3.0 2.5" HDD Dock
Power Supply	60W Power adapter with LED
Mounting	Comes with standard mounting bracket for Desktop, Wallmount or VESA
Dimensions	180mm(W) x 150mm(D) x 40mm(H)
Operating Temperature	0°C~ 45°C (32°F~113°F)
Storage Temperature	-20° ~ 80°C (-4°F~176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	mSATA: 5 grms / 5~500Hz / random operation
Certification	CE, FCC, UL
MTBF	System MTBF: 60,060 hours (Based on Telcordia Issue 3) Motherboard MTBF: 706,581 hours (Based on Telcordia Issue 3)

Ordering Information

CSB110-902	SGCC chassis for IB902, 4GB DDR3 memory, 2.5" HDD holder, 60W power adaptor
------------	---

Dimensions:

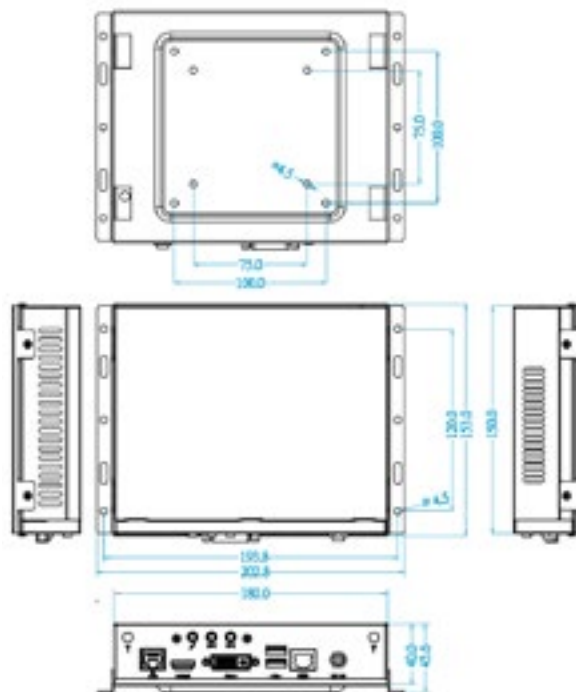

01

Motherboards

02

Disk-Size SBCs

03

CPU Modules

04

PC 104 Plus

05

CPU Cards

06

RISC SBCs

07

Embedded Systems