

ROC316A

PERFECTRON

Intel® Atom™ N2800 Fanless Rugged System, 9V to 30V DC-in,
Extended temperature -40 to 70°C



KEY FEATURE


- Supports Intel® Atom N2800 (1.86 GHz)
- 1 x 204-pin SO-DIMM DDR3 800/1066 up to 2 GB
- Supports 2.5" SATA HDD/SSD & CFast socket
- 5 x COM ports
- Dual GbE LAN ports
- 9V to 30V DC-in
- Wide temperature -40 to 70°C
- Ultra slim design (H: 51.0 mm)

it's perfect!

ROC316A

PERFECTRON

Intel® Atom™ N2800 Fanless Rugged System, 9V to 30V DC-in, Wide Temp. -40°C to 70°C



Main Features

- Supports Intel® Atom N2800 (1.86 GHz)
- 1 x 204-pin SO-DIMM DDR3 800/1066 up to 2 GB
- Supports 2.5" SATA HDD/SSD & CFast socket
- 5 x COM ports
- Dual GbE LAN ports
- 9V to 30V DC-in
- Wide temperature -40°C to 70°C
- Ultra slim design (H: 51.0 mm)

► Specifications

System

CPU Type	Intel® Atom™ N2800 1.86 GHz
Chipset	Intel® NM10
Memory Type	1 x 204-pin SO-DIMM DDR3 800/1066 up to 2 GB
BIOS	AMI® BIOS
Expansion Slot	1 x Mini PCIe slot
Ethernet	2 x RTL8111E GbE LAN
Storage	1 x 2.5" SATA HDD/SSD drive bay 1 x external CFast socket

Front I/O

USB	4
COM	4 x RS232 COM2~4 with 5V/12V selectable
Power Button	Yes
Power LED	Yes
HDD LED	Yes
Audio	Mic-in, Line-out


Rear I/O

DVI-I	1 (DVI-D + VGA)
Ethernet	2 x RJ45
USB	1
COM	1 x RS232/422/485 with 5V/12V selectable
Antenna	Reserved two antenna holes
Power Input	9V to 30V DC-in (By terminal block)
CFast Socket	1

Mechanical & Environment

Construction	Aluminum chassis with fanless design
Power Requirements	9V to 30V DC-in
Dimension (W x H x D)	195 x 51 x 230 mm (7.7" x 2" x 9")
Operating Temp.	-40 to 70°C (ambient with air flow)
Storage Temp.	-40 to 80°C
Relative Humidity	10% to 90%, non-condensing
Certifications	CE, FCC

► **Mechanical Drawing**

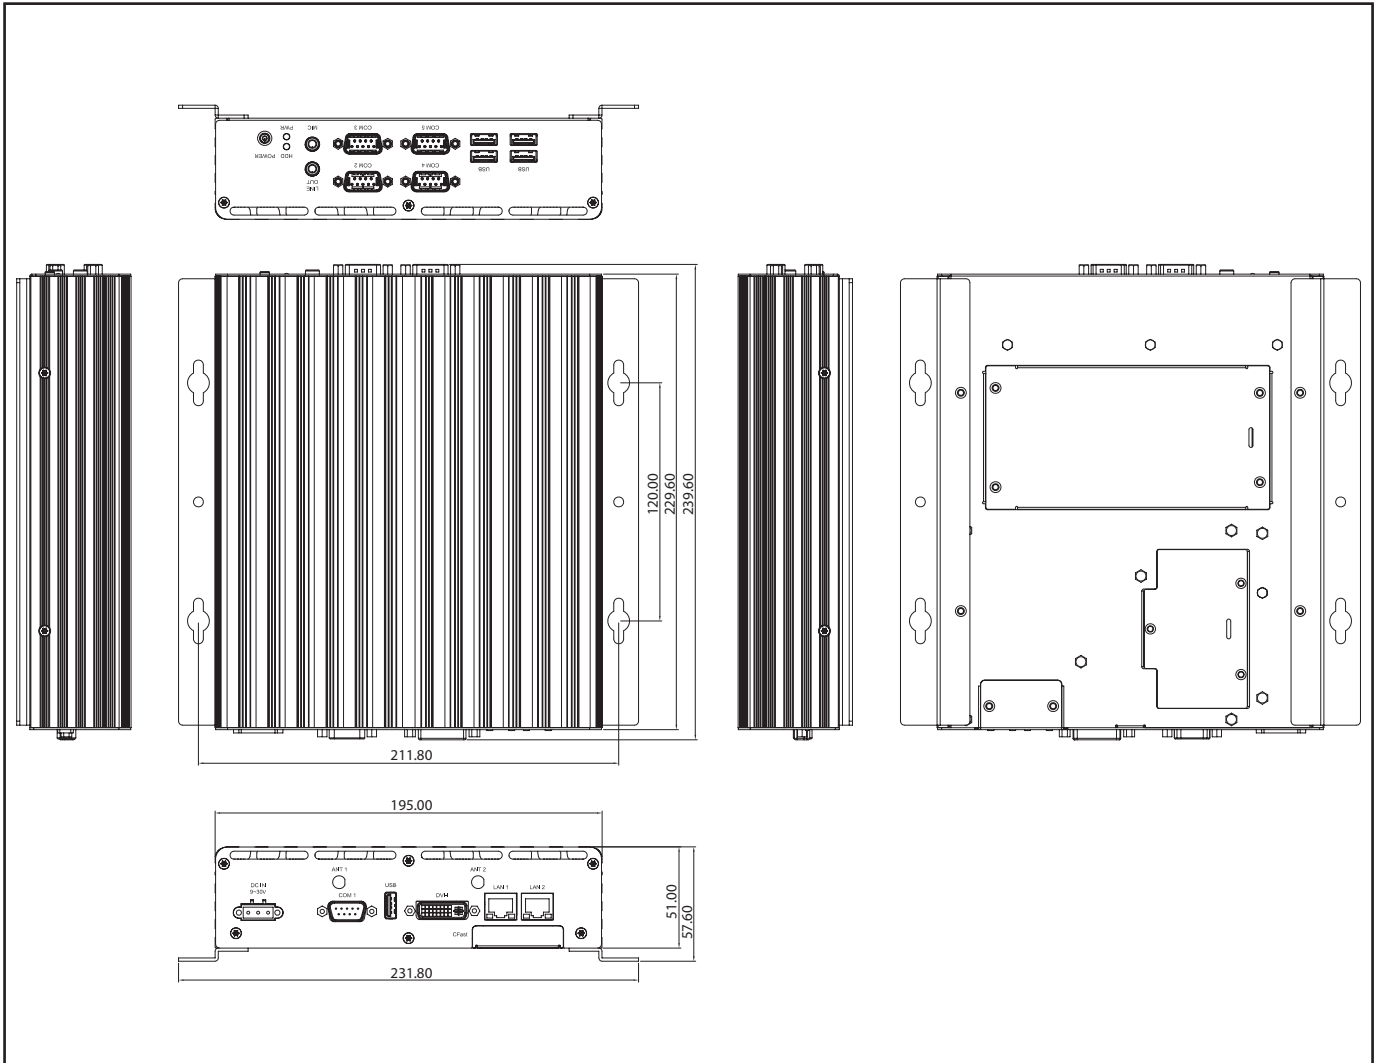

► **Packing List**

- ROC316A Fanless Rugged System
- Driver CD

► **Optional Accessories**

Power Adapter

12V, 60W, AC/DC power adapter w/o power cord

► **Ordering Information**

Modules

Model Number	Description
ROC316A-ET	Fanless Rugged System with Intel® Atom™ N2800 CPU, DVI-I, Dual GbE LAN, Audio, 5 x COM, 5 x USB, and 9V~30V DC-in (-20 to 70°C)
ROC316A-UT	Fanless Rugged System with Intel® Atom™ N2800 CPU, DVI-I, Dual GbE LAN, Audio, 5 x COM, 5 x USB, and 9V~30V DC-in (-40 to 70°C)



► **Applications**

