

DM-124PW

24" FHD 16:9 PCAP Modular Touch Monitor

Applications

- HMI Solution
- Industrial Automation
- Digital Transformation
- Indoor Ticketing Kiosk
- Security and Surveillance

Features

- Patented Display Conversion Device (DCD) Technology
- Designed with Aluminum Die-casting Ultra-Thin Front Frame
- IP65 True Front Panel for Waterproof and Dustproof
- Projected Capacitive Touchscreen
- 1920 x 1080 Resolution and 300nits Brightness
- Connectors for Display On/Off and External OSD Control
- 2 x 2W Internal Speakers
- -10°C to 60°C Operating Temperature



Ordering Information

Part No.	Description
DM-124PW	24" 16:9 FHD (1920x1080), 300nits, PCAP Touchscreen


Packing List

Description
1 x DM-124PW
Panel Mount Kits

Specifications

Model	DM-124PW	
Display	Panel Size	24"
	Panel Type	LCD Panel
	Aspect Ratio	16:9
	Resolution	1920 x 1080 (FHD)
	Viewing Angle	178(H) x 178(V)
	Brightness	300cd/m ²
	Contrast Ratio	5000:1
	Color Support	16.7M
Touchscreen	Touchscreen Type	Projected Capacitive (PCAP)
	Surface Hardness	7Mohs
	Transparency	90% (±3%)
System	OSD Control	Touch Monitor On/Off, Auto, Menu, Up and Down, Multi-language OSD
	Speaker	2 x 2W Internal Speakers
Environment	Operating Temperature	-10°C to 60°C
	Storage Temperature	-20°C to 70°C
	Humidity	10%~80% (non-condensing)
	Vibration	1.5Grms, 5-500Hz, 3Axis
	Shock	20Grms, Half-sine 11ms
General	Certification	CE / FCC
	Ingress Protection	IP 65 Compliant Front Panel
	Material	Front Panel Construction: Die-cast Flat Surface
	Mounting	Panel Mounting
	Dimensions (W x H x D)	584 x 353 x 35mm
	Net Weight	8.1kg

Dimensions

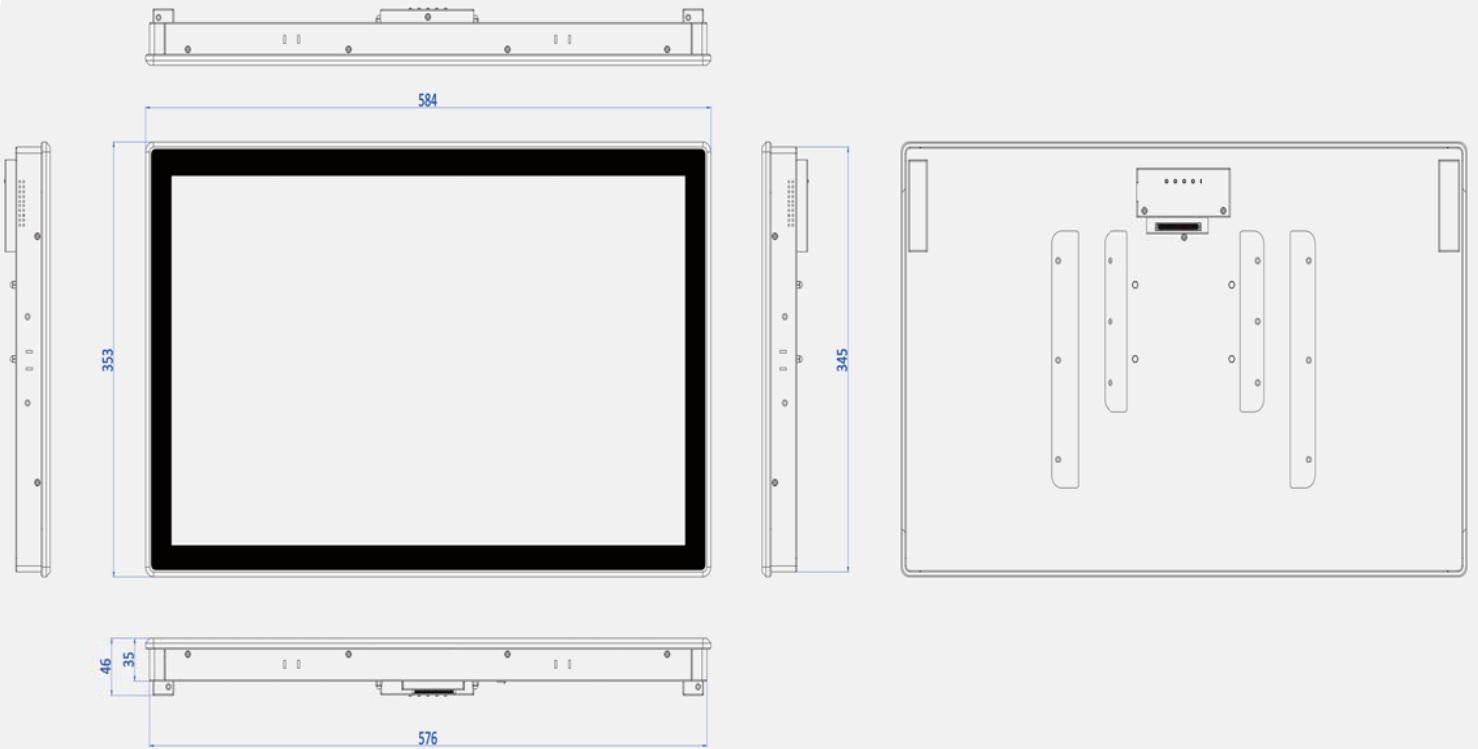

Viewing

IP65 True Front Panel for Waterproof and Dustproof

Connectors for Display On/Off and External OSD Control



PCAP Touchscreen

Aluminum Die-casting Ultra-Thin Front Frame

