

EAC-30N3

NVIDIA® Jetson Orin™ NX AI Box



NVIDIA®



Features

- Powered by NVIDIA® Jetson Orin™ NX
- Onboard 4/8GB 64/128-bit LPDDR5
- Multiple I/O interface connections for data collection
- Gigabit LAN, USB 3.1, Serial Port, CAN-FD
- Wide operating temperature range -20°C to 60°C

Specifications


System	
CPU/GPU	NVIDIA® Jetson Orin™ NX 6/8-core Arm® Cortex®-A78AE v8.2 64-bit CPU
Memory	Onboard 8/16 GB 128-bit LPDDR5
Storage	1 x M.2 M-Key 2280, support NVMe
Real time clock	Yes
Indicators	LED indicator x 1 (Power)
Wireless	1 x M.2 E-Key 2230 1 x M.2 B-Key 3052
Operating System	Linux (NVIDIA Jetpack 5.1.2/6.0)
Power Supply	
Power Requirement	9 to 36 VDC
Power Consumption	Max. 25W (with Fan)
MTBF (Hours)	--
Environmental and Mechanical	
Dimension	136mm x 110mm x 57mm
Weight	2.1 kg
Mouting/Installation	Din Rail, Wall Mount, VESA
Operating Temperature	-4 °F ~ 140 °F (-20 °C ~ 60 °C)
Storage Temperature	-40 °F ~ 176 °F (-40 °C ~ 85 °C)
Operating Humidity	10% ~ 95% relative humidity, non-condensing
Certification	
Regulations	CE, FCC, BSMI
Carrier	Planning

Interface	
Serial Port	1 x RS-485 with 5-pin Terminal Block
CAN Bus	1 x CAN-FD with 5-pin Terminal Block
Ethernet	Gigabit Ethernet RJ45 x1, Fast Ethernet RJ45x1
USB	4 x USB 3.1, Type-A
DI/DO	--
AI/AO	--
Display	1 x HDMI 2.0-Out
Power Connector	3-pin Terminal Block
Debug Port	1 x Micro USB for console
Expansion Slot	1 x SIM card slot
Other Interface	--

Radio Frequency		
LTE 4G (CAT 1) (Optional)	3GPP Rel.9 compliant protocol Frequency bands: FDD LTE: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19 /B20 /B25/B26/B28 TDD LTE: B38/B39/B40/B41 WCDMA: B1/B2/B4/B5/B6/B8/B19 GSM: B2/B3/B5/B8	SIM card size: nano-SIM slot Antenna type: External type Antenna connector: SMA-Male
GPS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo	

Dimension

Unit: mm / inch

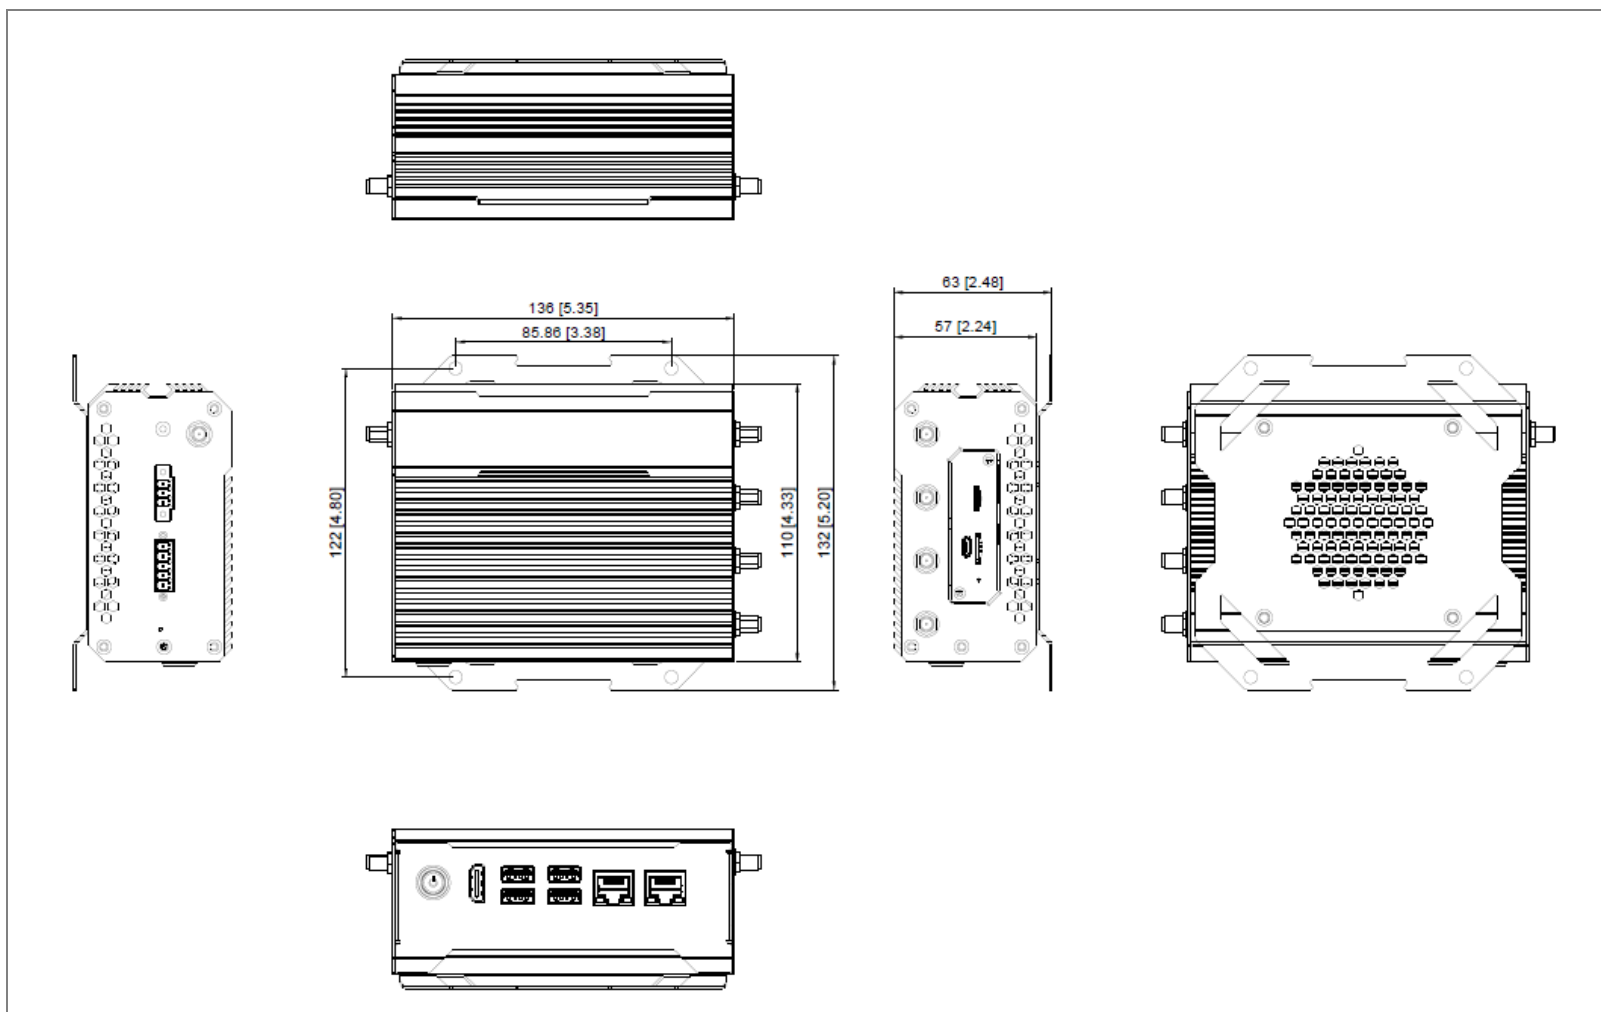

Ordering Information

Part Number	Packing List
2ENOL00DAP0002R NVIDIA® Jetson Orin™ NX, 8GB, 9 to 36VDC	EAC-30N3 BOX x1 3-pin Terminal block Connector x1 5-pin Terminal block Connector x1 Wall Mount x1
2ENOL00DAP0003R NVIDIA® Jetson Orin™ NX, 16GB, 9 to 36VDC	
2ENVPJ0XAIF3500-01 NVIDIA® Jetson Orin™ NX, 8GB, 128GB NVMe, 9 to 36VDC	
2ENVPJ0XAIF4500-01 NVIDIA® Jetson Orin™ NX, 16GB, 128GB NVMe, 9 to 36VDC	

Optional Accessories

Part Number / Item	
396CEAC3001	Adaptor IN:100-240V OUT:DC12V5A 60W 3Pin
4K02X00000030AR	Power Cord EU
4K02X00000020AR	Power Cord US
4710EM060KG5301	Quectel EM060K-GL 4G LTE, M.2 3042
4710RM520NG5301	Quectel RM520N-GL 5G NR, M.2 3052
4FP-MD00000	EnLi ENL-R8852BE WiFi 6 BT 5.2 M.2 2230