

D71 PLUS Dual 7" HDMI Rack Mount Monitor


Your complete live production, broadcast monitoring solution for anywhere



2x7"
Screen



FHD
FULL HD
1920X1200



4K
HDMI
In & Out



3D
LUT
Custom
3D-LUT



Scope
Analysis



Ethernet
Control




AI
Metal
Housing



KEY FEATURES

- 2x7 Inch 1920x1200 full HD IPS screen
- Intuitive buttons + new menu interface, convenient to operation
- 3RU rack mount design, easy to mount on TV wall or broadcast truck
- Upload custom 3D-LUT, preview film look
- With Waveform, Vector scope, RGB Histogram, Focus Assist, Monochrome etc. functions, help you accurately exposure and focus every shot
- Connect to Ethernet remotely adjust the monitor via software
- Front panel built-in 3 colors TALLY indicator, enhance shooting cooperation

USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD

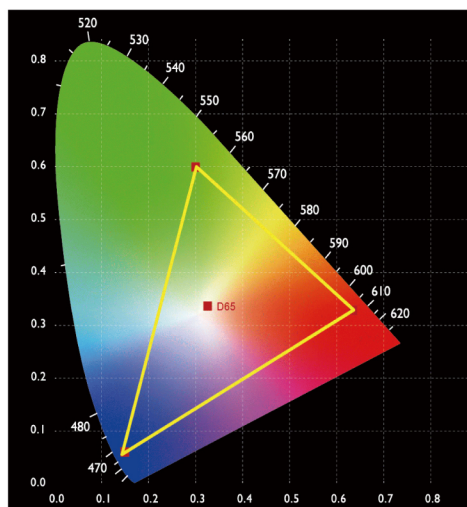

SMARTER TOOLS FOR ABSOLUTE PRECISION



Waveform



Vector



Histogram



RGB Histogram



Embedded Audio



Focus Peaking




Zoom



Zebra



Safe Frames



Etc.

>> USB UPGRADE/ LUT FILE IMPORTING




>> DC 12V, XLR CONNECTOR FLEXIBLE POWER SUPPLY




>> PARAMETER

Description	Dual 7" 3RU Broadcast SDI/HDMI Rack Mount Monitor
Model	D71 PLUS-H
Screen size	7"x2
Resolution	1920x1200 pixel
Dot pitch	0.07875 (W) x 0.07875 (H) mm
Aspect Ratio	16:10
Brightness	450cd/m2
Contrast	1100:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Inputs	HDMI, 3G/HD/SD-SDI, Audio(L/R),Video
Outputs	HDMI, 3G/HD/SD-SDI, Video, 3.5mm Audio Jack
Control Inputs	Ethernet
HDMI Support Format	480i/576i/480p/576p
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	4K 3840×2160p (30/29.97/25/24/23.98 Hz),
	4096×2160p (24Hz)
Power Consumption	≤21W
Input Voltage	DC 9V~24V
Operating Temperature	- 10°C ~ 60°C
Storage Temperature	- 30°C ~ 70°C
Install Way	Rack Mount
Unit Size	482.6Lx132Hx30.5D mm
Unit Weight	1890g

>> STRUCTURE

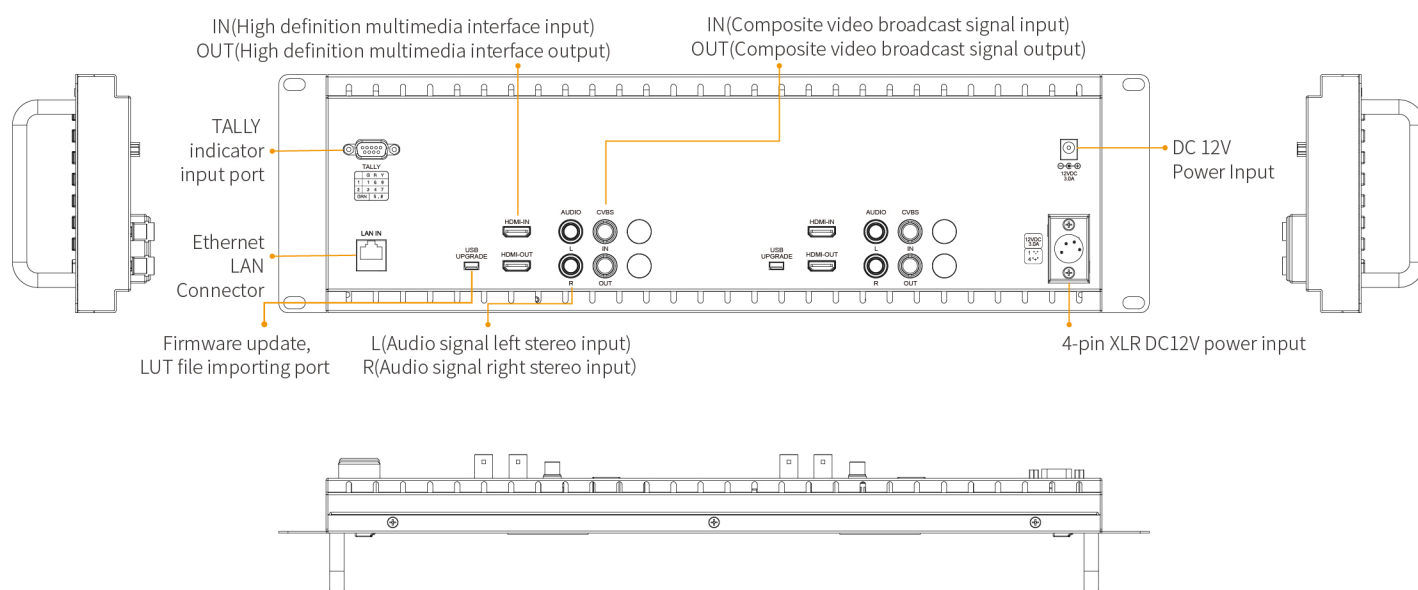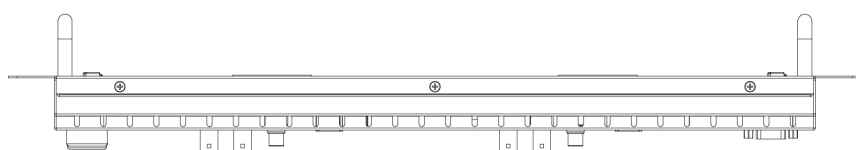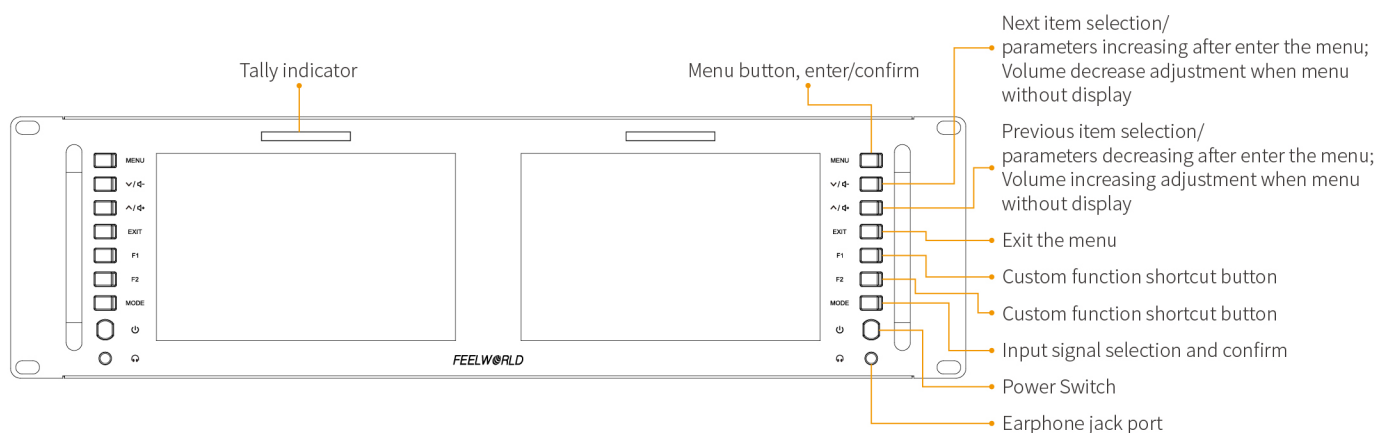

>> PACKING LIST

 Monitor	 Power Adapter	 Tally Kit	 Mini USB to USB Cable	 User Manual
---	--	--	--	--

HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE

CE **FC**



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn
www.seetec.com.cn

Fax: +86-596-2672617