

FEELWORLD®

F5 PROX

5.5" High Bright Field Monitor

Sony F970 External Install and Power Kit



5.5"
1920X1080



TOUCH
SCREEN



5V TYPE-C
POWER SUPPLY



DC
OUT



EXTERNAL INSTALL
AND POWER DESIGN




245G
LIGHT DESIGN



4K HDMI
IN&OUT



USE PROFESSIONAL
REC.709 COLOR
CALIBRATION STANDARD

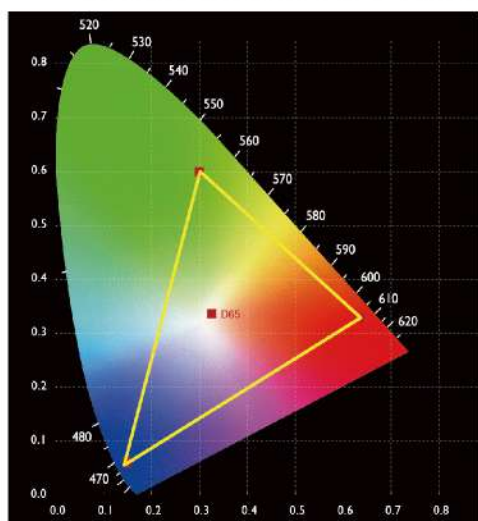

KEY FEATURES

- 5.5-inch 1920x1080 full HD IPS screen
- Touch screen and intuitive button operation, meet different needs.
- Custom 3D-LUT, preview film look
- Sony F970 external install and power kit design can be used to install and supply power to external equipment, easy to install and disassemble, simplify your photography equipment.
- With Waveform, Vector scope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Stereo Earphone output
- DC 8.4V power out to power your DSLR camera or mirrorless camera

PROFESSIONAL TOOLS FOR ACCURATELY EXPOSURE AND FOCUS EVERY SHOT



3D LUT



Waveform



Vector Scope



Histogram



Anamorphic Mode



Peaking Filter



False Colors



Exposure




Zoom-in



Image Flip



Embedded Audio



Nine Grid

>> MULTIPLE POWER SUPPLY MODES



F970

Sony F970 external install

DC IN 12V




Type-C 5V/Upgrade/LUT file importing



>> PARAMETER

Description	5.5" High Bright HDMI Field Monitor
Model	F5 PROX
Screen size	5.5" IPS
Display Colors	16.7M (8 bit)
Resolution	1920x1080 pixels
Dot pitch	0.069 (H) × 0.069 (W) mm
Aspect Ratio	16:9
Brightness	1600cd/m2
Contrast	1000:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI
Output	HDMI
Audio	3.5mm Stereo Headphone
Power In	DC IN 12V, Barrel (5.5mm outer, 2.1mm inner), DC IN 5V (Type-C) Note: please use 5V/2A or more than 2A Type-C power supply
Power Out	DC OUT 8.4V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
HDMI Support Format	480i/576i/480p/576p
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
	4K UHD 3840×2160p (30/29.97/25/24/23.98Hz), 4096×2160p (24Hz)
Power Consumption	≤9W
Input Voltage	DC7~24V
Power Connector	DC
Battery Plate	F970 Battery Plate
Operating Temperature	-20°C ~ 50°C
Storage Temperature	-30°C ~ 60°C
Install Way	¼-20 thread points (top, bottom, right, middle back)
Unit Size	148Lx93Hx21.75D (mm)
Unit Weight	245g (with F970 install and power kit)

>> STRUCTURE

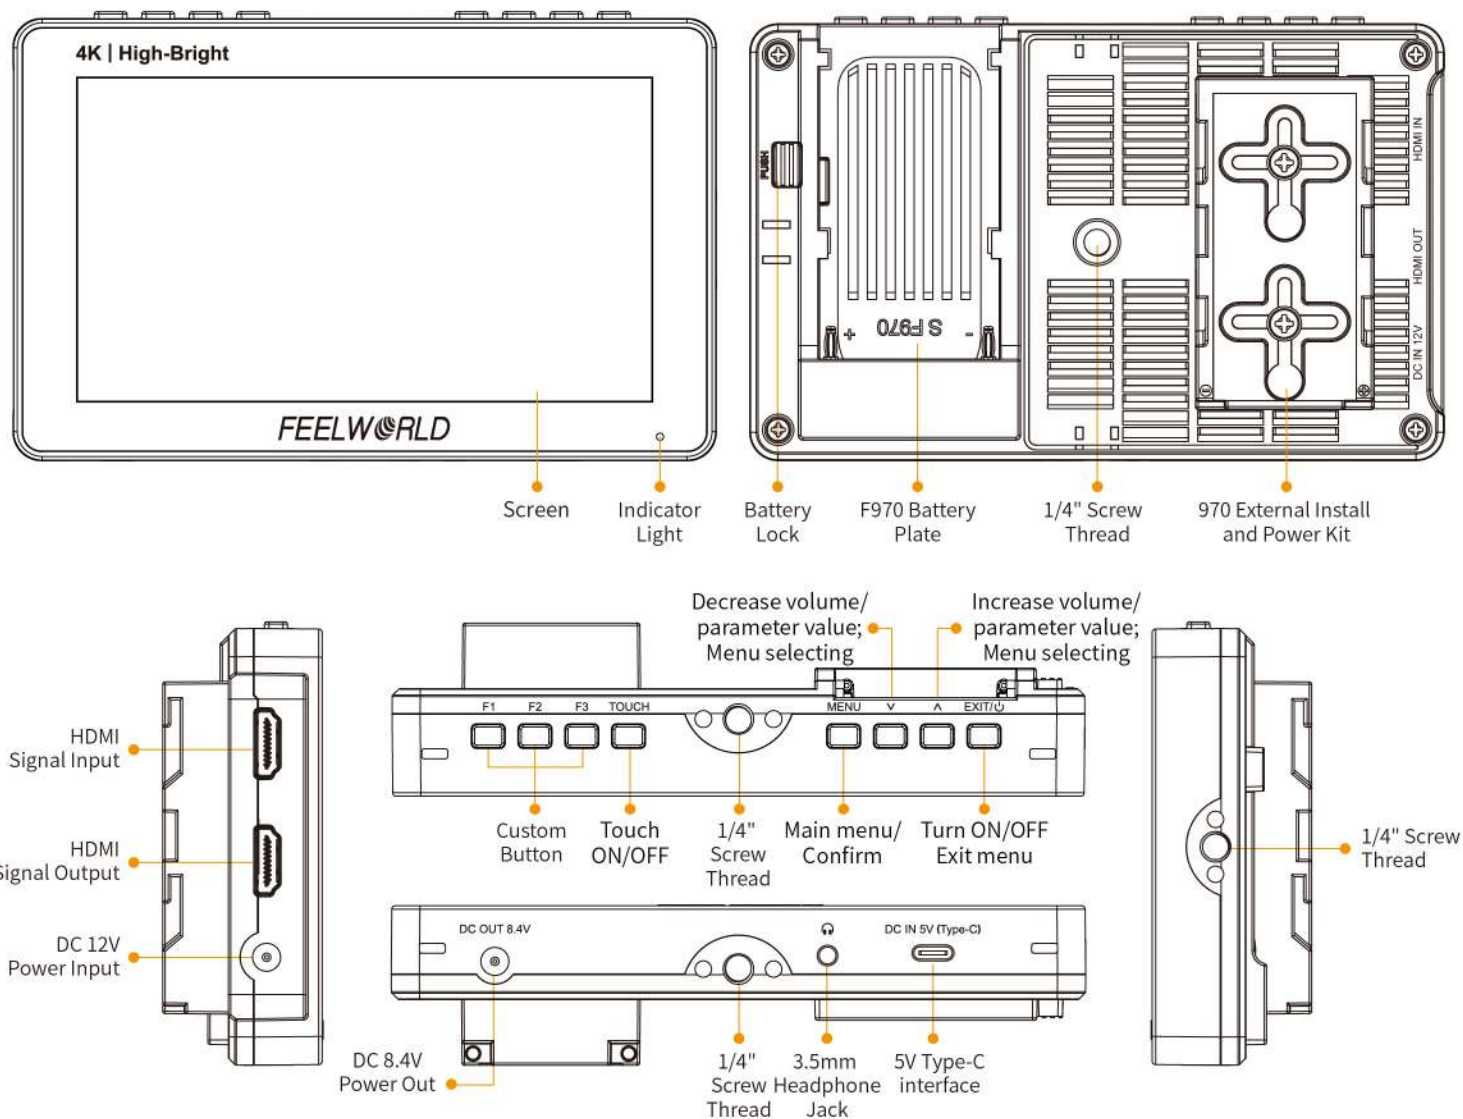

>> PACKING LIST

 Monitor	 Micro HDMI Cable	 Tilt Arm	 Sunshade
 Type-C to USB	 Disassemble Wrench	 User manual	