

F6
PLUS



Touch Screen

Custom 3D LUT

6" 4K On-camera Monitor

Make you properly monitor footage on set with the "look" you need!



1920x1080
FHD Resolution



Touch
Screen



Custom
3D LUT



4K HDMI
In & Out



5V Type-C
Power Supply



235g
Light Design



Power
for Camera




Dual-purpose
Battery Plate



>> FEATURES

- 6-inch 1920x1080 full HD IPS screen.
- Touch screen menu operation, easy to use.
- Supports 3D LUT Log to REC.709 and user 3D LUT upload (up to 32).
- With Waveform, Vector scope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Supports screenshots + image overlay function, convenient to compare the composition and correct displacement during the shooting.
- Multiple power supply modes, DC IN 12V, Type-C 5V and NP-F & LP-E6 dual battery slot.
- Stereo Earphone output
- DC 8V power out to power your DSLR camera or mirrorless camera.

>> USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD

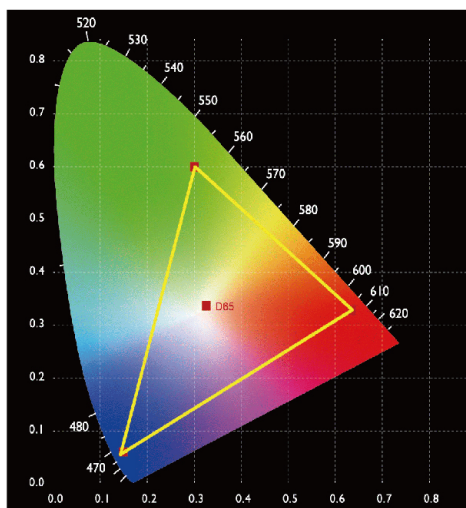

>> PROFESSIONAL AND RICH AUXILIARY FUNCTIONS



Vector
Scope



Auto
mirror



Anamorphic
Mode



Peaking
Filter



False
Colors



Ratio
Marker



Embedded
Audio



Check
Field



Waveform



3D LUT



Histogram



Pixel-to-Pixel



Image Flip



Zoom-in



Exposure



Nine Grid

>> FLEXIBLE POWER SUPPLY MODE


>> SD CARD FIRMWARE UPDATE LUT FILE IMPORTING



>> PARAMETER

Description	6-inch 3D LUT HDMI Touchscreen On-camera Monitor
Model	F6 PLUS V2
Screen size	6" Touch Screen
Color Gamut	16.7M (8 bit)
Resolution	1920x1080 pixels
Aspect Ratio	16:9
Brightness	450cd/m2
Contrast	1000:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI, SD Card
Output	HDMI
Audio	3.5mm Stereo Headphone
Power In	DC IN 12V, Barrel (5.5mm outer, 2.1mm inner), DC IN 5V (Type-C)
Power Out	DC OUT 8V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
HDMI Input/ Output Support Format	480i/576i/480p/576p
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
	4K 3840×2160p (60/50/30/29.97/25/24/23.98Hz)
	4K 4096×2160p (60/50/30/29.97/25/24/23.98Hz)
Power Consumption	≤8W
Input Voltage	DC7~24V
Power Connector	DC
Battery Plate	F970/ LP-E6 Dual-purpose Battery Plate
Operating Temperature	-20°C ~ 50°C
Storage Temperature	-30°C ~ 60°C
Install Way	¼-20 thread points (top, bottom, right)
Unit Size	148Lx93Hx20D (mm)
Unit Weight	235g

>> STRUCTURE

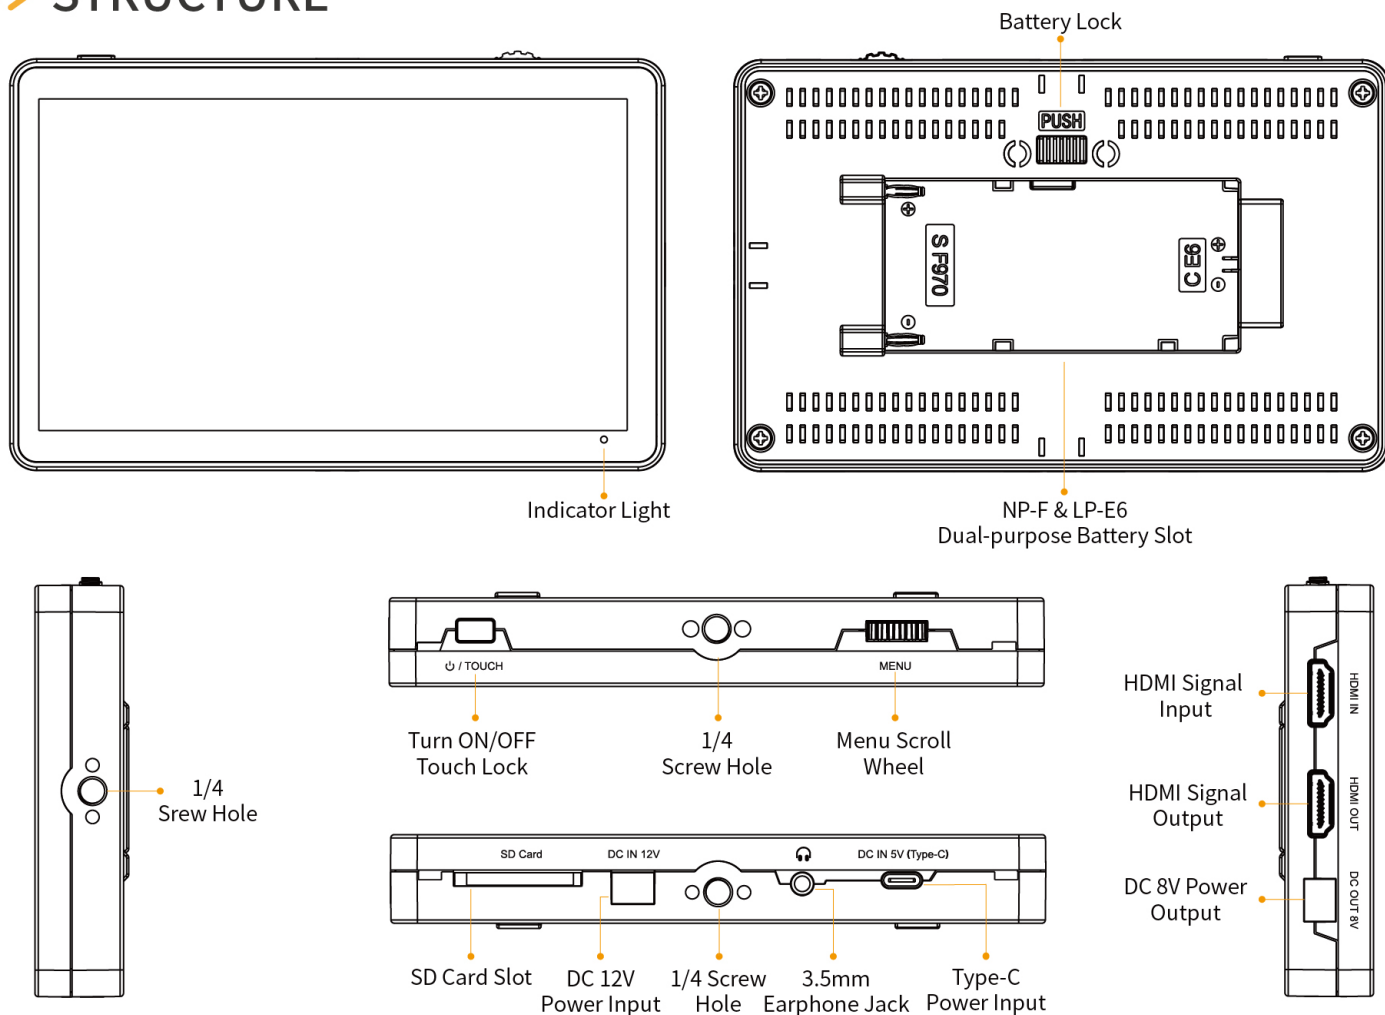

>> PACKING LIST

 Monitor	 Micro HDMI Cable	 Tilt Arm
 Sunshade	 User manual	

HDMI[®]
HIGH-DEFINITION MULTIMEDIA INTERFACE

CE FC



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn
www.seetec.com.cn

Fax: +86-596-2672617