


F7 PLUS

7" Field Monitor



7"
1920X1200



1200NIT



TOUCH



HDMI
2.0



CUSTOM
3D-LUT



HDR
MONITORING



EXTERNAL
POWER DESIGN



POWER
FOR CAMERA



FHD 1920x1200 | **8bit** Color Depth | **1200:1** Contrast | **160°** Viewing Angle

KEY FEATURES

- 7-inch full HD IPS screen, viewing details with confidence
- Touch screen menu operation, improve shooting efficiency
- Sony F970 external install and power kit design can be used to install and supply power to external equipment, easy to install and disassemble, simplify your photography equipment.
- Supports 3D LUT Log to REC.709 and user 3D LUT upload (up to 32).
- 4-group user switching, quickly access the already set menu
- Waveform, Vector, Histogram and audio meter can moveable horizontally and vertically
- HDR monitoring, what you see is what you get
- DC 8V power out to power your DSLR camera or mirrorless camera
- Stereo Earphone output

Full Range of Auxiliary Functions



3D LUT



Waveform



Vector Scope



Histogram



Peaking Filter



Embedded
Audio



Ratio Marker



Overscan



Aspect Ratio



Anamorphic
Mode



Exposure




Check Field




False Colors



Nine Grid



Screen Marker



Pixel-to-Pixel



Image Flip



Image Freeze




Center Marker



Zoom-in


>> Multiple Power Supply Ways/NP-F External Intall and Power Design

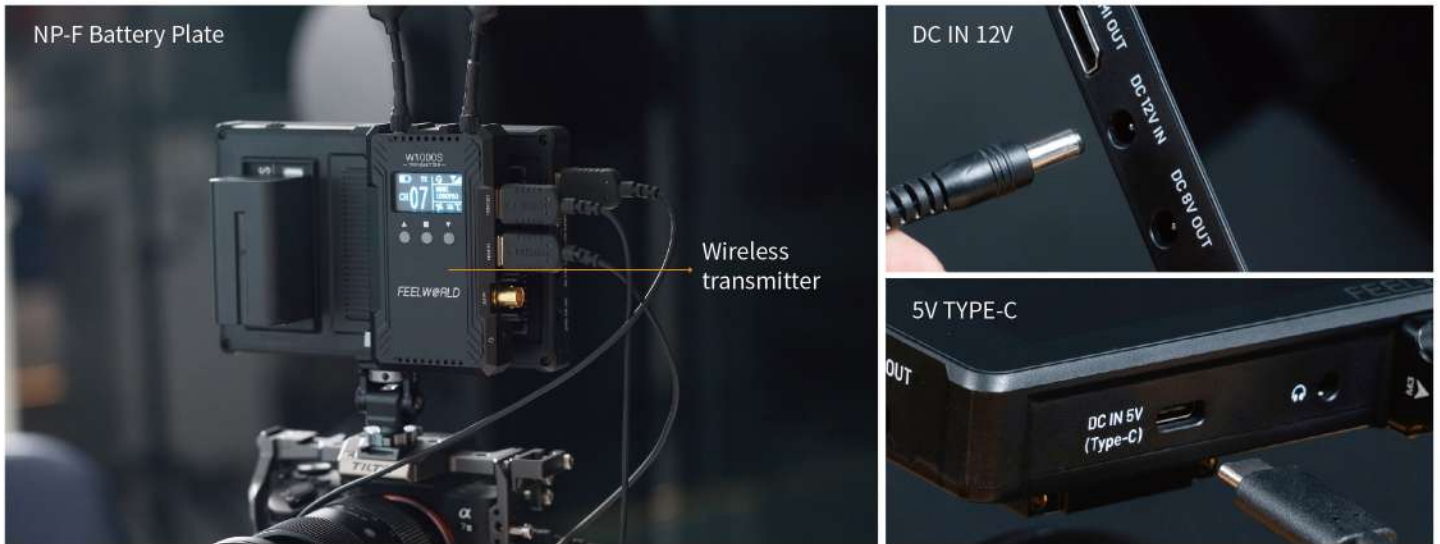

>> PARAMETERS

Model	F7 PLUS
Screen size	7" IPS
Display Colors	16.7M
Color Depth	8 bit
Resolution	1920x1200 pixels
Dot pitch	0.07875(W) × 0.7875 (H) mm
Aspect Ratio	16:10
Brightness	1200cd/m2
Contrast	1200:1
Backlight	LED
Response time	Ton+Toff=25ms
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI2.0
Output	HDMI2.0
Other Interface	SD Card Slot
Audio	3.5mm Stereo Headphone
Power In	DC IN 12V, Barrel (5.5mm outer, 2.1mm inner) DC IN 5V (Type-C) Note: please use 5V/2A or more than 2A Type-C power supply
Power Out	DC OUT 8V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera), F970 install and power system
HDMI Support Format	480i/576i/480p/576p 720p (60/59.94/50/30/29.97/25/24/23.98) 1080i (60/59.94/50) 1080p (60/59.94/50/30/29.97/25/24/23.98) 3840×2160p (60/50/30/29.97/25/24/23.98) 4096×2160p (60/50/30/29.97/25/24/23.98)
Power Consumption	≤15W
Input Voltage	DC7~24V
Power Connector	DC
Battery Plate	F970 Battery Plate
Operating Temperature	-20℃ ~ 50℃
Storage Temperature	-30℃ ~ 60℃
Install Way	¼-20 thread points (top, bottom, right,)
Unit Size	186x117x21(mm)
Unit Weight	389g

>> STRUCTURE

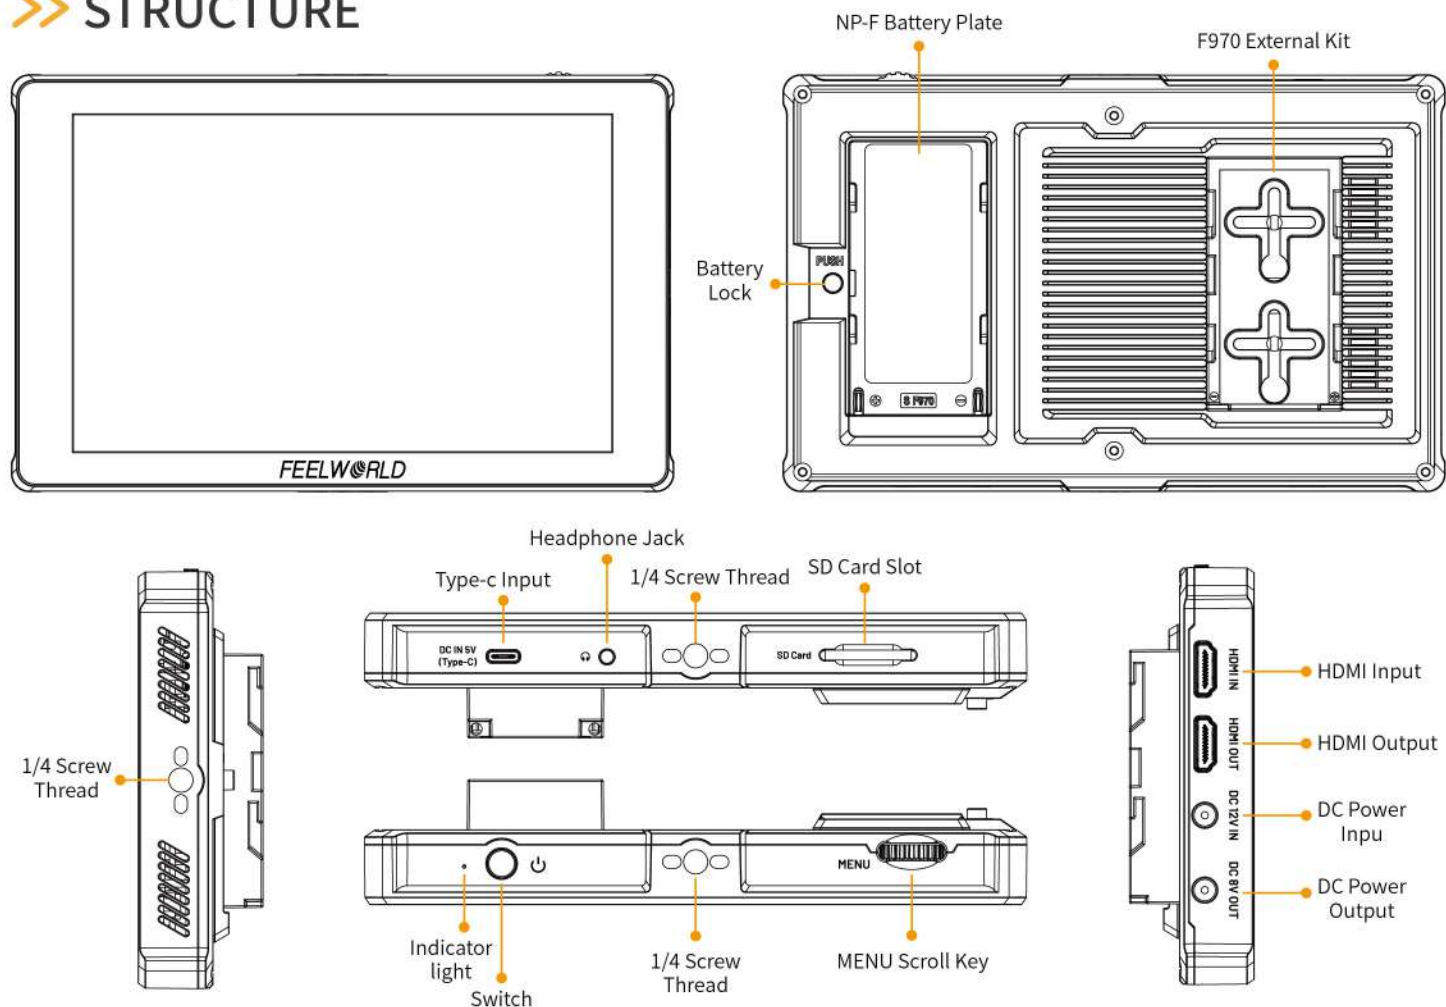

>> PACKAGING LIST

 A black rectangular monitor with a silver bezel. The bottom bezel has the text "FEELWORLD" in silver.	 A black cable with a Micro HDMI connector on one end and a standard HDMI connector on the other.	 A black cable with standard HDMI connectors on both ends.
Monitor	Micro HDMI Cable	HDMI Cable

 A black metal hot shoe mount with a hexagonal base and a hexagonal top. A silver hex wrench is placed next to it.	 A black metal wrench with a curved handle and a circular opening at the end.	 A black metal frame with a hinged sunshade attached to the top.	 A white user manual with a black border. The text "7" 高亮摄影监视器" is at the top, followed by a diagram of the monitor, and "使用说明书" at the bottom.
Mini Hot Shoe Mount + Hex Wrench	Disassemble Wrench	Sunshade+Frame	User Manual