

Optical Bonding Process & IP65 Rating Front Panel


The optical bonding process can remove the air layer between the LCD panel and the glass, ensuring that foreign objects such as dust and moisture will not damage the LCD panel. Front panel complies with IP65 standard, and with working temp -20°C~70°Csuitable for both outdoor and indoor use.

Robust aluminium case design, black and silver color options with excellent heat dissipation, industrial 900nits panel,


Industrial Grade Metal Housing Design

make it suitable for outdoor sunlight conditions.













Support Multiple Installations


3mm panel, most suitable for embedded installation

Buckle holes on the side, standard VESA holes 75* 75mm/ 100* 100mm



Support VGA, HDMI, DVI Automatic Identification Signal Channel

Phoenix Terminal

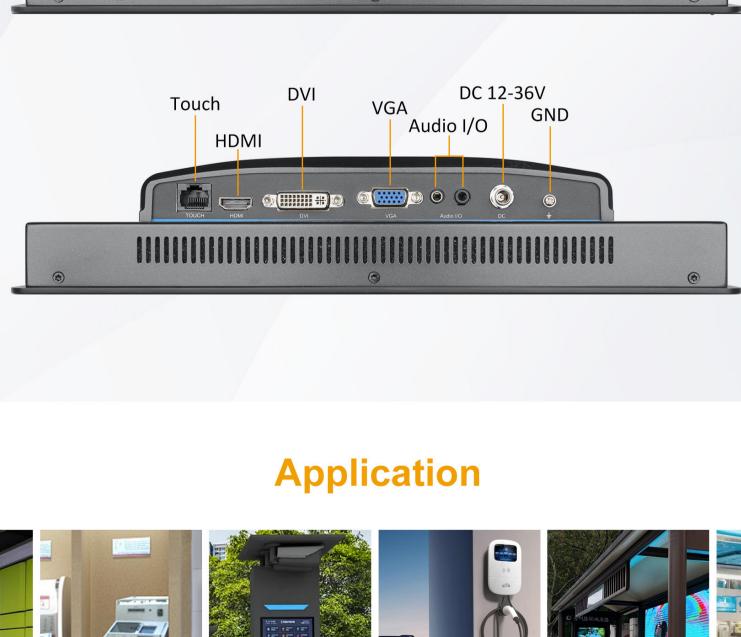


32.0

Charging Piles


0 0

KIOSK

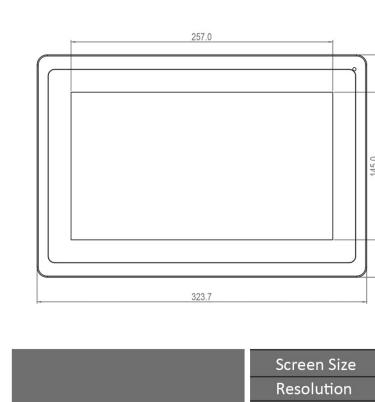

ATM

Parcel Lockers

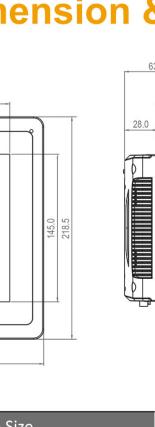


Humidity

NEWay®

Working Temperature

Storage Temperature

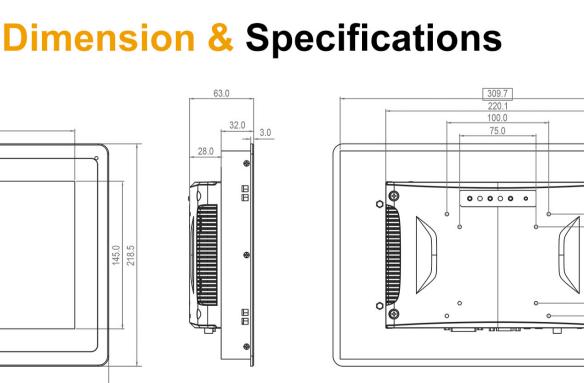

Intelligent Bus Stop

Smart Retails

75.0 100.0 144.1 204.5

323.7		
Screen Info	Screen Size	11.6 inch LCD
	Resolution	1920*1080
	Aspect Ratio	16:9
	Contrast	1000:1
	Display Color	16.7M
	Viewing Angle	85/85/85(L/R/U/D)
	Brightness	900cd/m²
	Touch Type	Capacitive Touch
Motherboard	Power Connector	Phoenix Terminal *1, DC *1
	Signal Interface	DVI, HDMI, VGA
	Touch Interface	RJ45 to act as USB for touch
	Other Interfaces	Audio Input and Output
	Brightness Switch	Manual Brightness and Auto Brightness Switch Button
	Ground Column	Support
Motherboard	Material	Aluminum Alloy
	Color	Black
	IP Rating	Front Panel IP65 Dustproof and Waterproof
	Power Input	Support DC 12V~36V
	Installation Method	Embedded, Desktop, Wall-mounted, VESA ARM Optional

95% Non-Condensing

-20°C∼70°C

-30°C~80°C