


19" inch Industrial Embedded Ultra Flat IP65 Monitor


MONITOR SOLUTIONS FOR WIDE RANGE OF INDUSTRIAL & COMMERCIAL APPLICATIONS




DC12-36V




1000nits




1280x1024 Resolution




Touch



Wide Temp



7*24H



Optical bonding

KT19FC-D

Optical Bonding Process & IP65 Rating Front Panel


The optical bonding process can remove the air layer between the LCD panel and the glass, ensuring that foreign objects such as dust and moisture will not damage the LCD panel. Front panel complies with IP65 standard, and with working temp -20°C~70°C suitable for both outdoor and indoor use.

-20°C

70°C

Industrial Grade Metal Housing Design


Robust aluminium case design, black and silver color options with excellent heat dissipation, industrial 1000nits panel, make it suitable for outdoor sunlight conditions.




Aluminum Alloy



Excellent Heat Dissipation




Silver Case (Optional)



Waterproof Speaker Holes

Support Multiple Installations

3mm panel, most suitable for embedded installation
Buckle holes on the side, standard VESA holes 75* 75mm/ 100* 100mm

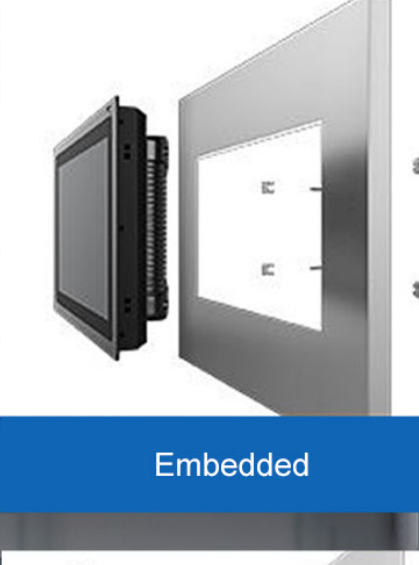

Embedded




Folding holder(optional)




VESA(optional)



Wall-mounted (optional)

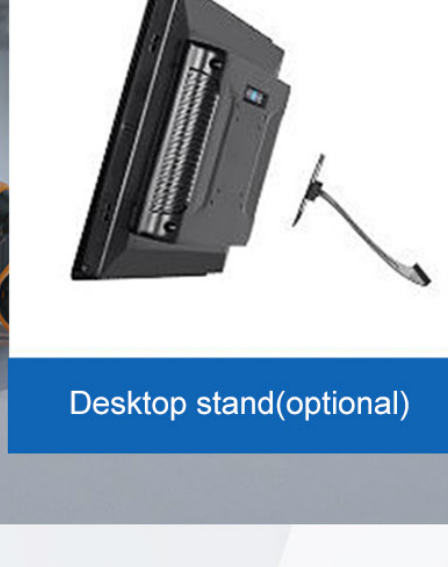

Desktop stand(optional)

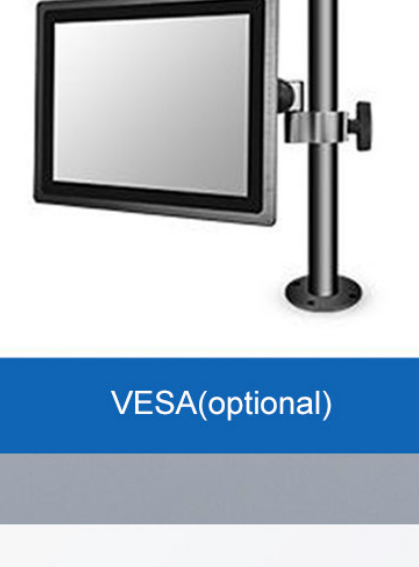

VESA(optional)

Rich Interfaces

Support VGA, HDMI, DVI Automatic Identification Signal Channel


Brightness Switch



Touch DVI VGA DC 12-36V Audio I/O Phoenix Terminal GND




Application

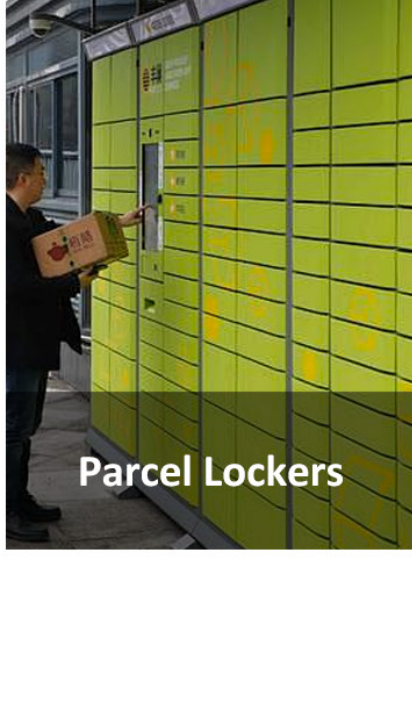


Parcel Lockers




ATM

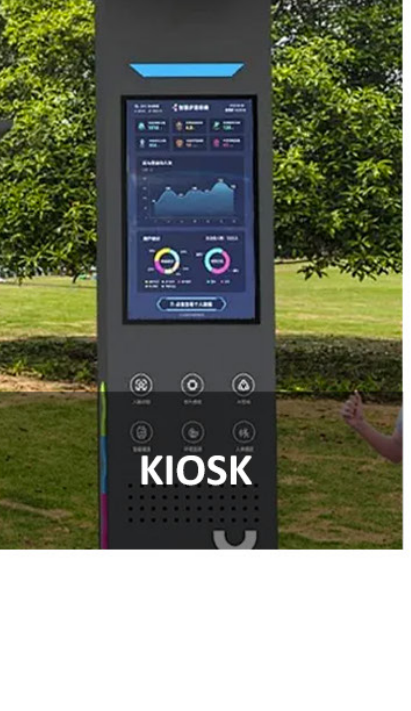

KIOSK

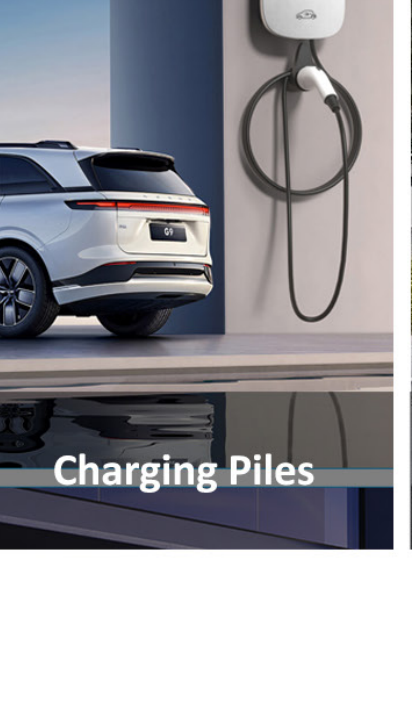

Charging Piles



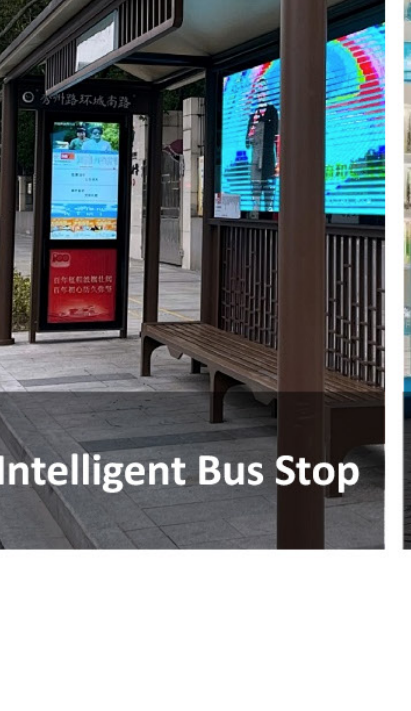


Intelligent Bus Stop



Smart Retail

Dimension & Specifications

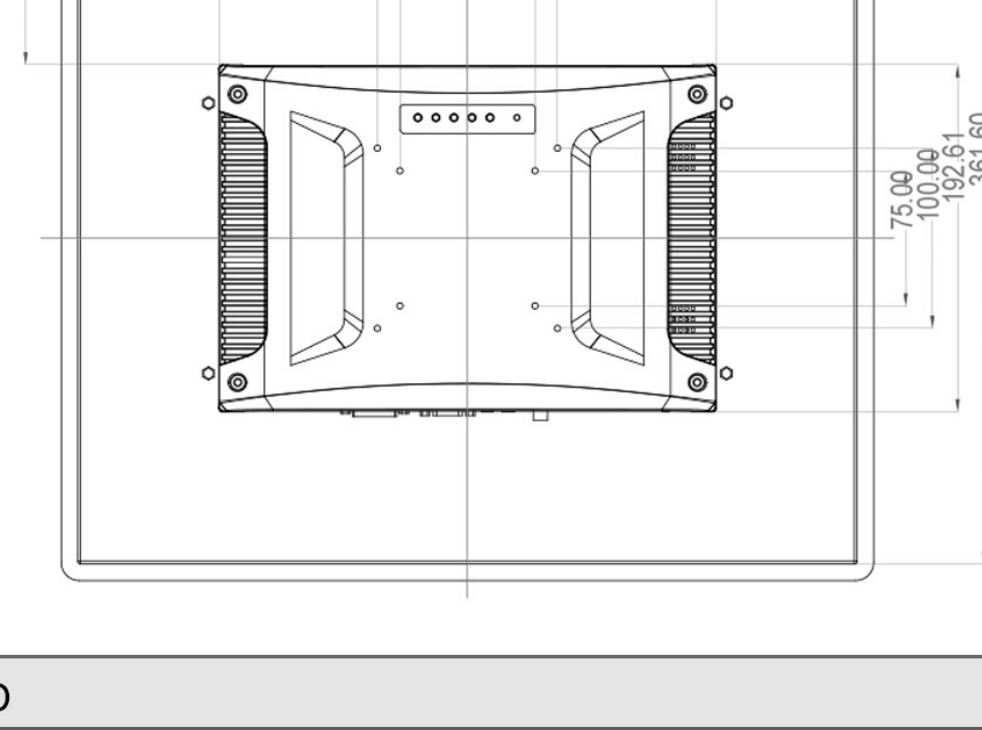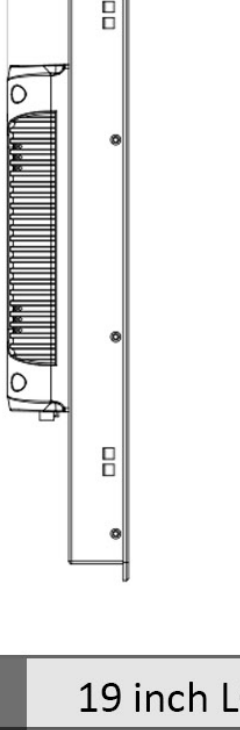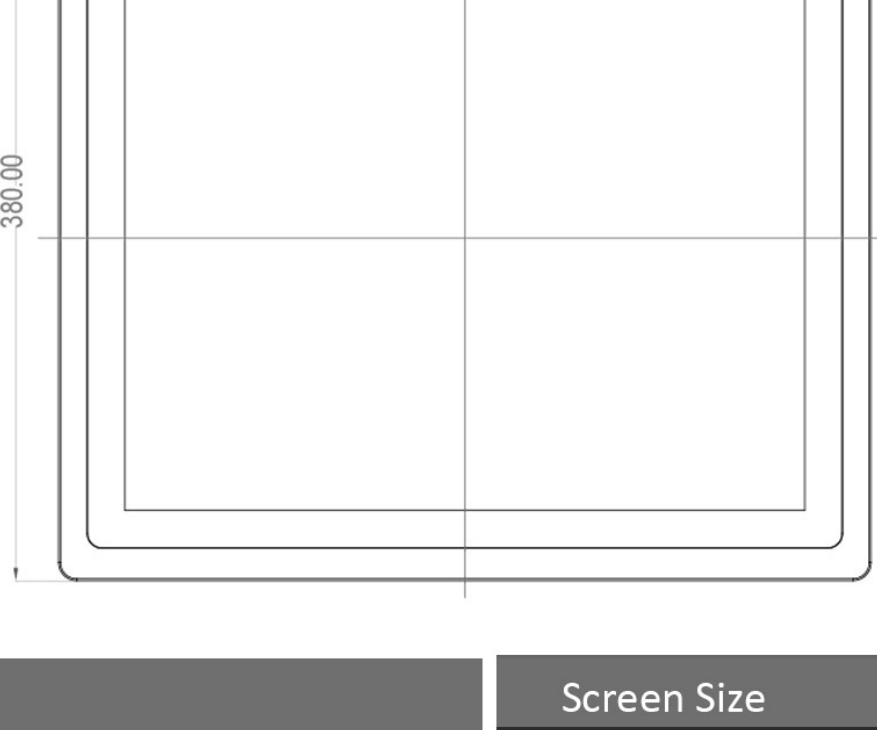

Screen Info	Screen Size	19 inch LCD
	Resolution	1280*1024
	Aspect Ratio	4:3
	Contrast	1000:1
	Display Color	16.7M
	Viewing Angle	85/85/80/80 (L/R/U/D)
Motherboard	Brightness	1000cd/㎡
	Touch Type	Capacitive Touch
	Power Connector	Phoenix Terminal *1, DC *1
	Signal Interface	DVI, HDMI, VGA
	Touch Interface	RI45 to act as USB for touch
	Other Interfaces	Audio Input and Output
Motherboard	Brightness Switch	Manual Brightness and Auto Brightness Switch Button
	Ground Column	Support
	Material	Aluminum Alloy
	Color	Black
	IP Rating	Front Panel IP65 Dustproof and Waterproof
	Power Input	Support DC 12V~36V
Motherboard	Installation Method	Embedded,Desktop,Wall-mounted,VESA ARM Optional
	Humidity	95% Non-Condensing
	Working Temperature	-20°C~70°C
	Storage Temperature	-30°C~80°C