

**SEF-B3660**

36.6" 1920x290 Resolution  
Stretched Bar Display




**Stretched Bar Monitor**

[www.seform.com.tw](http://www.seform.com.tw)



**Features**




- 36.6 inch Industrial Grade Stretched Bar Monitor
- High Brightness 1000 cd/m2 TFT Surface
- Resolution 1920 x 290
- IK07 Front Vandal Proof Protection
- Front IP53 Dust and Water Proof Design
- Anti-Glare Surface treatment
- Support Brightness Auto Dimming Function
- Backlight MTBF 50,000 Hours
- High Contrast 5000:1
- Over Voltage Protection Design
- Industrial Grade Metal Enclosure

**Specification**

Screen Size	36.6"
Aspect Ratio	60:9
Display Resolution(dot)	1920 x 290

Active Area(mm)	919.296(H) x 138.852(V)	
Pixel Pitch(mm)	0.1596 (H) x 0.4788(V)	
Display Colors	16.7million	
Brightness (Typ.)	1000 cd/m2 (TFT Surface)	
Contrast Ratio	5000:1	
Response Time	11ms (Typical)	
View Angle	178°(H), 178°(V)	
Backlight MTBF	50,000 Hours (min.)	
IP Rating	Front IP53	
Vandal Proof	IK07 Tempered Glass with AG Surface Treatment (AF Optional)	
I/O Port	Video	HDMI x1 VGA x1
	Audio (Optional)	Audio-in x1
	Power Plug	<b>AC:</b> IEC 320 C14 3-pin AC Cord (female) <b>DC:</b> 2.5x5.5mm DC Jack (M12 Optional)
Power Rating	<b>AC:</b> AC-110~240V <b>DC:</b> Standard: 24V, Option: DC48V or DC110V *With Over Voltage Protection design for DC input.	
Power Consumption(watt)	TBD	
Dimension(mm)	987.50 x 177.00 x 85.20	
Mounting(mm)	VESA mount 400 x 50	
Operating Temperature	-20 ~ 60 °C	
Ordering Information	SEF-B3660-A	Power Rating: AC110~240V Input
	SEF-B3660-DA	Power Rating: DC-24V Input
	SEF-B3660-DB	Power Rating: DC-48V Input
	SEF-B3660-DC	Power Rating: DC-110V Input
Certification	<b>Front IK07</b> impact protection, compliant with <b>IEC 62262</b> <b>Front IP53</b> protection, compliant with <b>IEC 60529</b>	

Mechanical Drawing

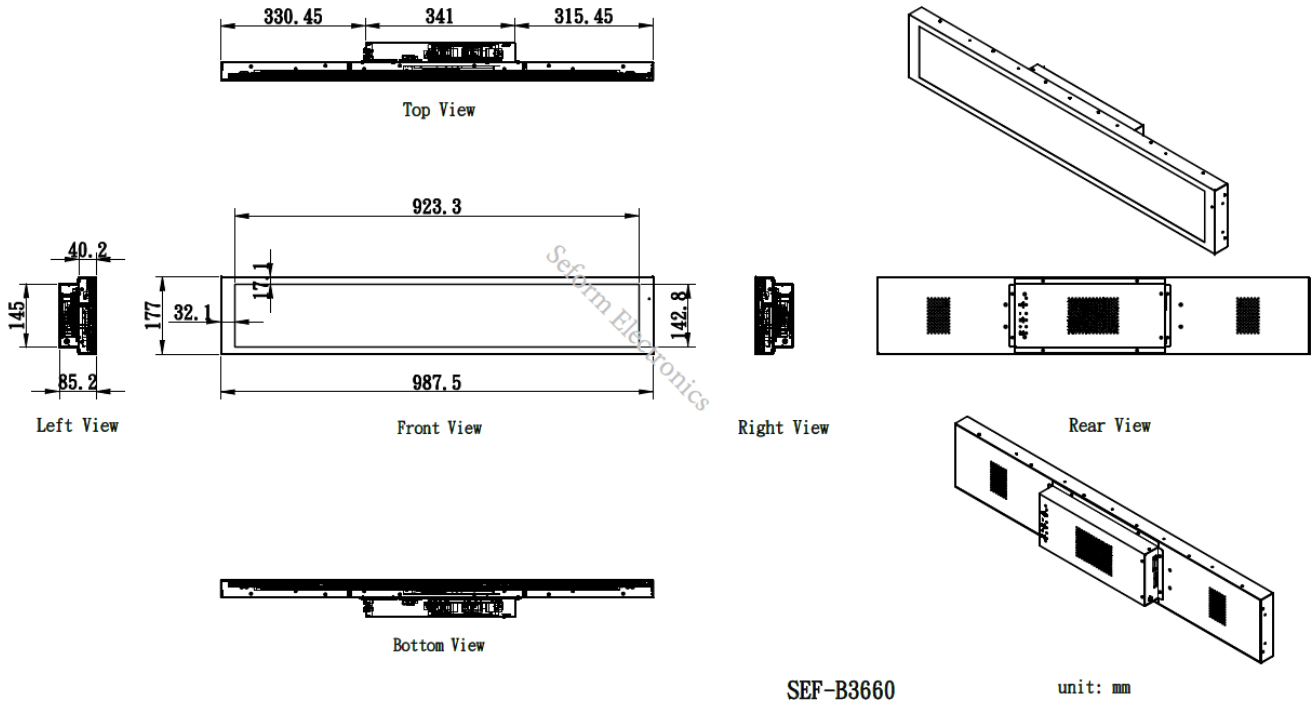

\*All specifications are subject to change without notice.