

SEF-B4850

48.5" 3840x720 Resolution
Stretched Bar Display




Stretched Bar Monitor

www.seform.com.tw



Features

- 48.5 inch Industrial Grade Stretched Bar Monitor
- High Brightness 1000 cd/m2 TFT Surface
- Resolution 3840 x 720
- IK07 Front Vandal Proof Protection
- Front IP53 Dust and Water Proof Design
- Anti-Glare Surface treatment
- Support Brightness Auto Dimming Function
- Backlight MTBF 50,000 Hours
- High Contrast 5000:1
- Over Voltage Protection Design
- Industrial Grade Metal Enclosure

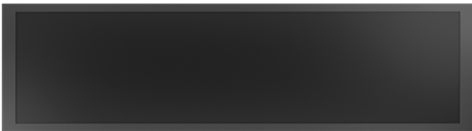


Specification

Screen Size	48.5"
Aspect Ratio	48:9
Display Resolution(dot)	3840 x 720

Active Area(mm)	1209.6 (H) x 226.8 (V)	
Pixel Pitch(mm)	0.315 (H) x 0.315 (W)	
Display Colors	1.07G colors (8-bit+FRC)	
Brightness (Typ.)	1000 cd/m ² (TFT Surface)	
Contrast Ratio	5000:1	
Response Time	12ms (Typical)	
View Angle	178°(H), 178°(V)	
Backlight MTBF	50,000 Hours (min.)	
IP Rating	Front IP53	
Vandal Proof	IK07 Tempered Glass with AG Surface Treatment (AF Optional)	
I/O Port	Video	DVI x1 HDMI x1 DP x2
	Audio (Optional)	Audio-in x1
	Power Plug	AC-In Model: IEC 320 C14 3-pin AC Cord(female) DC-In Model: 2.5x5.5mm DC Jack (M12 Optional)
Power Rating	AC-In Model: AC-110~240V DC-In Model: Standard: 24V, Option: DC48V or DC110V *With Over Voltage Protection design for DC input.	
Power Consumption(watt)	TBD	
Dimension(mm)	1238.6(L) x 255.8(W) x 87.85(D)	
Mounting(mm)	VESA mount 600 x 100	
Operating Temperature	-20 ~ 60 °C	
Ordering Information	SEF-B4850-A	Power Rating: AC110~240V Input
	SEF-B4850-DA	Power Rating: DC-24V Input
	SEF-B4850-DB	Power Rating: DC-48V Input
	SEF-B4850-DC	Power Rating: DC-110V Input
Certification	Front IK07 impact protection: IEC 62262 Front IP53 protection: IEC 60529	

Mechanical Drawing

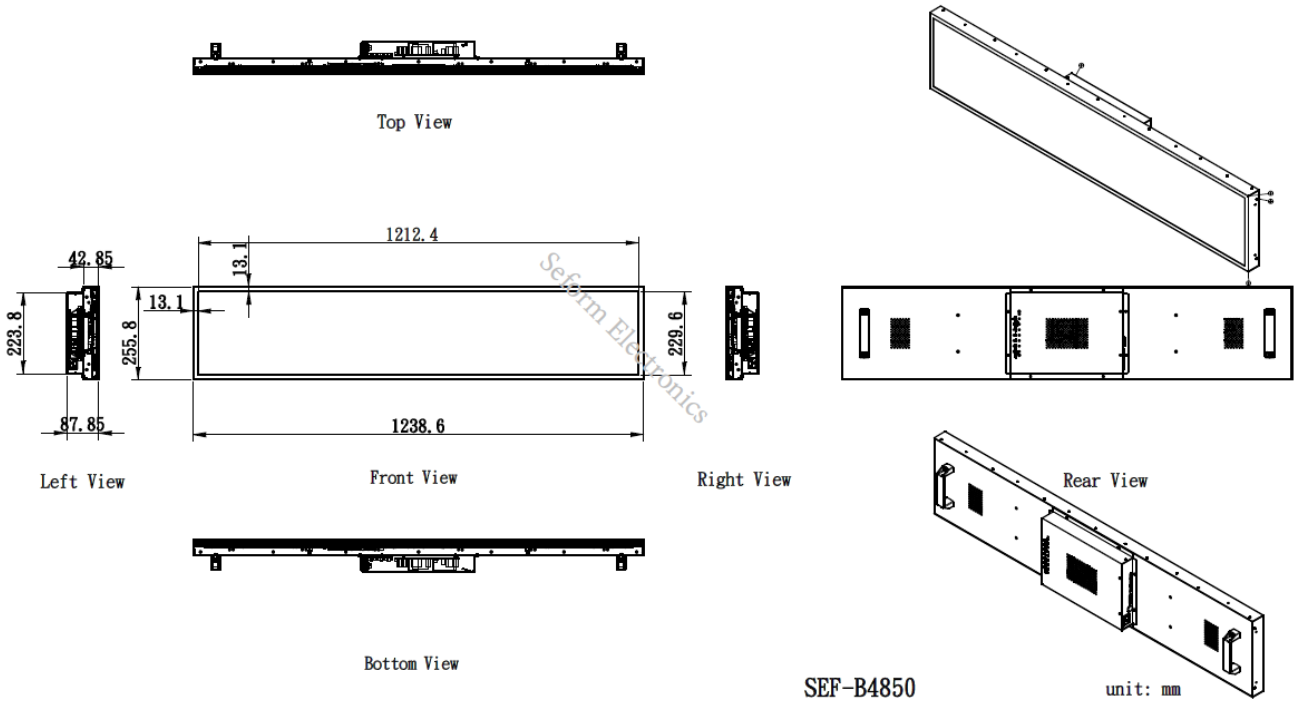

*All specifications are subject to change without notice.